

Analysis on Efficiency of BFCL in Transient Stability Enhancement of DFIM-Based Wind Generator

Midde Soniya & L. Anitha,

¹M.Tech Student, Dept. of EEE, INTELL Engineering College, Affiliated to JNTUA, Andhra Pradesh, India

²Assistant Professor in Dept. of EEE, , INTELL Engineering College, Affiliated to JNTUA, Andhra Pradesh, India

ABSTRACT: In this paper Transient stability is a major sympathy toward doubly fed induction machine (DFIM). A DFIM-based wind generator is promptly influenced by shortcomings at the network side as its stator windings are interfaced to grid. Be that as it may, the wind generators need to stay connected and proceed with operation during flaws at the grid side as indicated by the network code prerequisites. Along these lines, it is imperative to improve the transient soundness of the DFIM-based wind generators. To accomplish upgraded transient steadiness of the DFIM, a bridge type fault current limiter (BFCL) is proposed through FLC in this paper. Symmetrical as well as unsymmetrical faults were applied to test system efficiency of the BFCL in transient stability enhancement. Simulations were carried out in Matlab/Simulink environment. To demonstrate the effectiveness of the proposed BFCL, its performance is compared with series dynamic braking resistor (SDBR). Simulation results of BFCL gives better stabilization of DFIM.

Keywords: BFCL, SDBR, Doubly Fed Induction Machine (DFIM), Rotor-Side Converter (RSC) and Grid Side Converter (GSC), Fuzzy Logic Controller (FLC)..

I. INTRODUCTION

Technological advancement and industrialization has brought the expansion up in electrical power demand all around the globe. Quick fatigue and restricted store of fossil powers, escalation of natural concerns have made it dire to look for alternative energy sources and to devise enhanced techniques for abusing renewable energy sources. Among the available renewable energy sources, wind energy is the quickest developing and most noticeable choice to create electric power because of its zero fuel cost, no carbon discharge, lower maintenance, and cleaner, less expensive and renewable nature. It is assessed that around 10% of worldwide power interest will be supplied from the wind energy by the year 2020. Because of adaptability in operation and upgraded highlights like higher output power, higher proficiency, enhanced power quality, variable pace operation, lower mechanical weight on turbine subsequently bring down support, decoupled control of the active and reactive power, the variable rate wind generators are getting to be favored decision for new establishments and drawing higher consideration than the conventional impelling machine-based altered rate wind generators. Lower cost, sturdiness, basic structure, probability to cover an extensive variety of wind

rate, in part evaluated variable frequency ac/dc/air conditioning converter and lower switching loss have made the doubly sustained incitement machine (DFIM) a better decision over the other wind generator choices.

Contrasted with variable pace wind generators having full appraised converter, the DFIM is more powerless against grid shortcoming or unsettling influences from the soundness point of view, as its stator windings are straight forwardly associated with system while rotor windings are interfaced to grid by means of the rotor-side converter (RSC) and the grid side converter (GSC) that are connected consecutive through a dc-link capacitor. At the occasion of system deficiency, terminal voltage of the DFIM goes low and high current moves through both stator and rotor winding. This is a danger to stable operation and may inevitably blaze the machine and the converters. Customarily, to shield from such blame occurrences, wind generators were detached from the grid. The converter of the DFIM topology has the control capacity to keep up solidness at flaw condition. Since the converters have fractional rating, their ability alone is deficient to guarantee dependability. A helper gadget like static synchronous compensator is proposed yet it needs extra converter, coupling transformer and symphonious channels. Energy stockpiling systems like flywheel energy stockpiling, superconducting attractive energy stockpiling and superconducting deficiency current limiter are additionally proposed, however the high establishment cost counterbalances their great execution.

The bridge type fault current limiter (BFCL) is another method with promising applications in power systems and issue ride through ability improvement of altered speed wind turbine generators. Be that as it may, the BFCL is never connected to improve the transient solidness of DFIM-based wind generators. In this study, execution of the BFCL on upgrading the transient stability of the DFIM in wind energy application is researched. The effectiveness of the proposed BFCL is shown through a test wind energy conversion system. The system comprises of a wind turbine furnished with a DFIM, a transformer and the double circuit transmission lines connected with the boundless bus. Transitory symmetrical and unsymmetrical shortcomings were connected at the most powerless purpose of the system. Where ω_r is the angular mechanical speed. The wind turbine

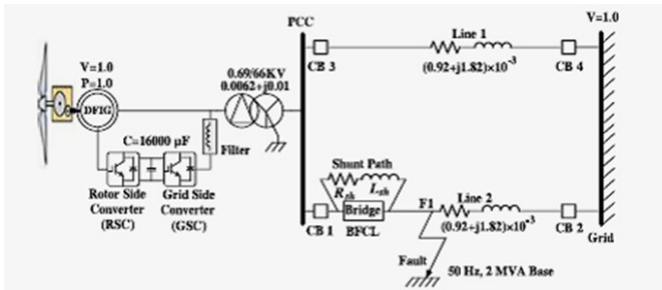


Fig. 1 Basic diagram of the DFIM with the test system.

II. WIND TURBINE AND DFIM MODELING

A solitary mass system is considered for the demonstrating of the wind turbine. The turbine mechanical part progression is dismissed because of little span of the considered deficiencies. The DFIM itself is fundamentally an actuation generator with the stator windings directly connected with grid and open rotor windings connected with the grid through the ac/dc/ac converter as appeared in Fig. 1. Fig. 1 likewise demonstrates the one line graph of the test system model alongside the line parameters. A 2-MW DFIM is connected with the point of common coupling (PCC) through a phase up transformer. The PCC is connected with network through double circuit transmission line. The BFCL is connected in series with one of the transmission lines to secure it as appeared in Fig. 1. The SDBR is likewise connected at the same point in comparative style. Displaying of the wind turbine, the DFIM and the converter controllers are outlined in the consequent segments.

A. Wind Turbine Modeling

The displaying of the wind turbine relies on upon different physical and geometrical angles. For effortlessness, considering the electrical conduct of the system just, a streamlined strategy for displaying the wind turbine is typically utilized. The normally utilized scientific connection for the mechanical power tackled from the wind, can be communicated as takes after

$$P_w = \frac{1}{2} \pi \rho R^2 V_w^3 C_p(\lambda, \beta) \quad \text{---(1)}$$

Where P_w is the extracted power from the wind, ρ is the air density, R is the blade radius, V_w is the wind velocity, and C_p is the power coefficient which is a function of both the tip speed ratio λ , and the blade pitch angle β and it is given by

$$C_p(\lambda, \beta) = \frac{1}{2} (\lambda - 0.022\beta^2 - 5.6) e^{-0.17\lambda} \quad \text{---(2)}$$

$$\lambda = \frac{\omega_r R}{V_w} \quad \text{---(3)}$$

Where ω_r is the angular mechanical speed. The wind turbine parameters used in this study.

B. DFIM Modeling

Many works like have portrayed the demonstrating of the DFIM. The Park's change model, which is basically the fifth-order two-axis representation is displayed the DFIM. A synchronously turning d – q reference edge is utilized with its d-hub adjusted to the stator flux. A decoupled control between the rotor excitation current and the electrical torque is gotten. Thusly, the reference angle is turning with the same pace as the stator flux.

C. RSC Controller

The RSC is a two-level, six-beat, Insulated gate bipolar transistor (IGBT) [CM200HG-130H] based full extension power electronic ac/dc converter that couples the rotor side to the dc link. The RSC controller takes the terminal active power P_t , the reactive power Q_t and the terminal voltage V_t as inputs and controls the output active and reactive power. It utilizes the proportional integral (PI) controllers to deliver fitting three phase (SVPWM) signal generator square, with the goal that it can create beats for the IGBT switches of the RSC. The Park's change is utilized to change over three phase amounts into proportional d – q parts and the other way around. The slip edge is produced by looking at the rotor position and the terminal voltage angle with the assistance of the phase-locked loop (PLL), and the slip is utilized as change point as a part of the Park's change square. Amounts with "*" refere to reference value as appeared in Fig. 2.

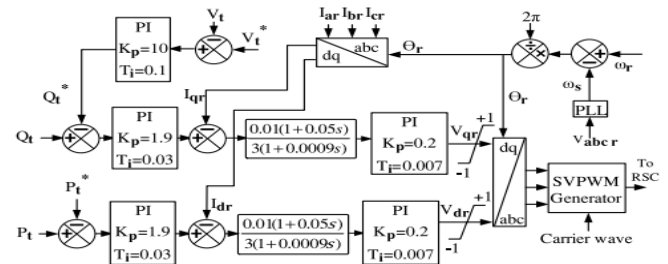


Fig. 2. RSC Controller

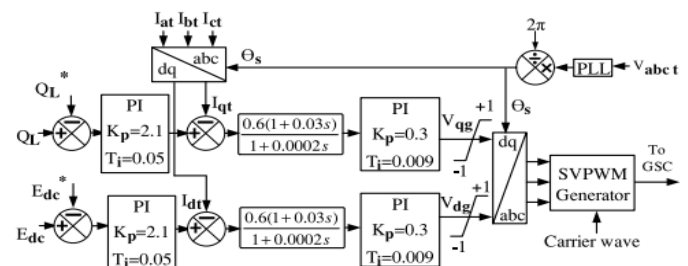


Fig. 3. GSC controller.

reference signal for space vector pulse width modulation (SVPWM) signal generator block, so that it can generate pulses for the IGBT switches of the RSC [27]. The Park's transformation is used to convert three phase quantities into equivalent d-q components and vice versa. The slip angle is generated by comparing the rotor position and the terminal voltage angle with the help of the phase-locked loop (PLL), and the slip is used as transformation angle in the Park's transformation block. Quantities with "*" refer to reference value as shown in Fig. 2.

D. GSC Controller

The GSC also contains a two-level, six-pulse, IGBT [CM200HG-130H] based full bridge power electronic ac/dc converter with the dc side connected to the dc link and the ac side interfaced to the grid. This converter essentially helps maintain a constant power factor at the connection point. It is important to choose an appropriate switching frequency to keep the harmonics to the minimum level. A frequency of 1650 Hz is chosen as it is an odd multiple of the third harmonic and can minimize up to thirteenth harmonics. The GSC controller scheme is given in Fig. 3. It takes the dc link voltage E_{dc} and the rotor line reactive power Q_L as inputs and produces the necessary outputs so that the SVPWM pulse generator can generate required pulses for the GSC converter. Also, by maintaining a constant dc-link voltage, the controller ensures the energy balance on the both sides of the dc link.

III. BFCL

BFCL Configuration

The BFCL is composed of two sections, namely the bridge part and the shunt path. The first part is essentially the bridge part composed of a few diodes $D1-D4$ [Semikron SKNa 402], a small-valued dc reactor L_{dc} equipped with a parallel free-wheeling diode $D5$ placed in series with an IGBT [CM200HG-130H] switch arranged as shown in Fig. 4. The IGBT switches normally come in a package with free-wheeling diode which is not shown here. Also, to include the inherited resistance of the inductor, a very small value resistor R_{dc} is considered. The second part is a shunt path composed of a resistor R_{sh} and an inductor L_{sh} placed in parallel to the bridge part as in Fig. 4.

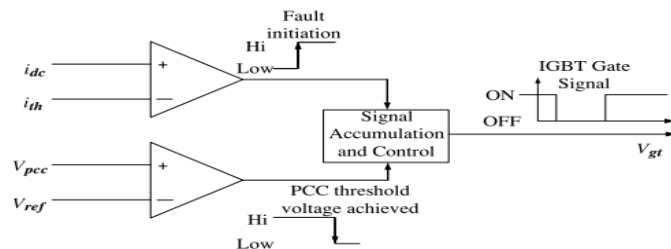


Fig. 5. BFCL controller

BFCL Operation

During normal operating condition of the system, the IGBT switch in the bridge part remains closed. For one half cycle of electrical frequency, the $D1-L_{dc}-R_{dc}-D4$ path carries the line current and for the other half it is carried by $D2-L_{dc}-R_{dc}-D3$. So, the current through L_{dc} , flows in the same direction and this current is the dc current i_{dc} . L_{dc} is charged to the peak current and offers no impedance to i_{dc} . The dc reactor inherited resistance, the IGBT turn-on resistance and the diode forward voltage drop cause some voltage drop, but this voltage drop is quite negligible compared to line drop and has ignorable significance. So the bridge has no impact on normal or steady state operation.

V. SIMULATION RESULTS

A. BFCL 1LG

In below figures 6,7,8,9 shows BFCL1LG. It is seen that BFCL can maintain voltage at rated level properly. The BFCL performance is better than SDBR. The machine speed oscillation is kept to lowest and variation is minimum so machine is well stable with application of BFCL. The output active power fluctuation is lowest and active power demand is highest from fault initiation to breaker opening with application of BFCL. DC link voltage can retain more stable voltage than SDBR.

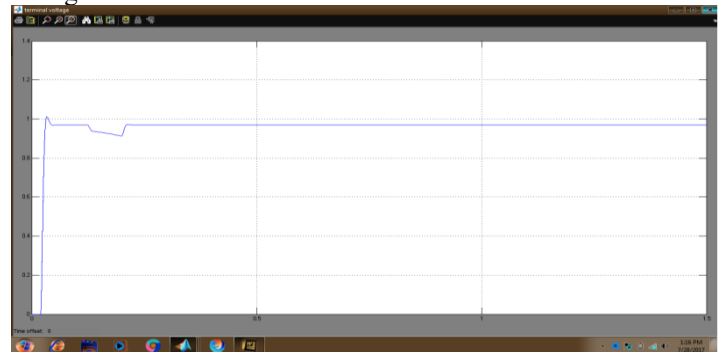


Fig. 6 Terminal voltage

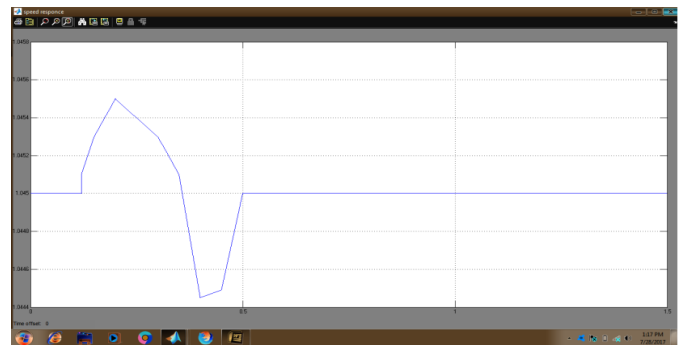


Fig.7 Speed response

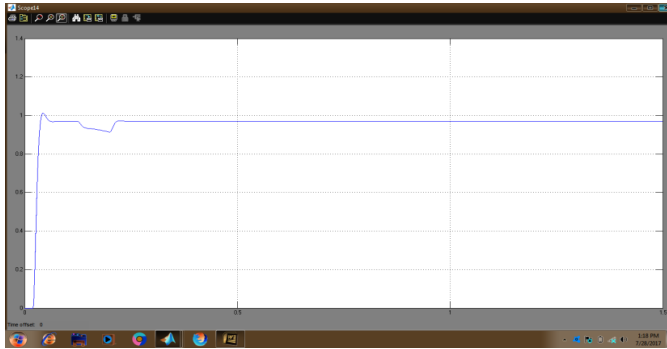


Fig.8 Active Power Response:

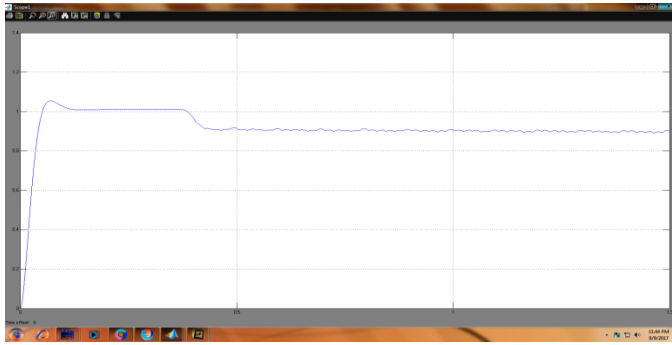


Fig.9 DC link voltage

B. BFCL 3LG:

In below figures 10,11,12,13,14 shows BFCL 3LG. It is seen that voltage level of BFCL keeps 0.1 p.u of nominal value which indicates BFCL is more sensitive and faster respond to fault and gives better voltage stabilization than SDBR. The BFCL limits the rate of rising of machine speed and ensures better stability than SDBR because it totally prevented by application of BFCL. The output power demand to the machine is highest with low fluctuation at fault and breaker opening instant. Faster stabilization of output power is also provided with BFCL . It consumes more active power than SDBR from fault initiation to breaker opening instant and gives better transient stability. It is also noticeable that BFCL has no active power during normal operation. It is possible to maintain more constant dc link voltage and GSC controller works well in conjunction with BFCL.

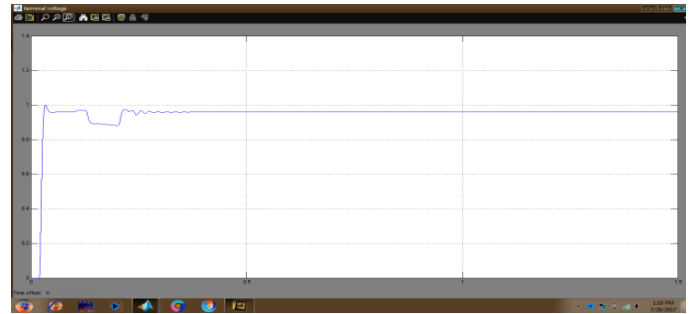


Fig.10 Terminal voltage

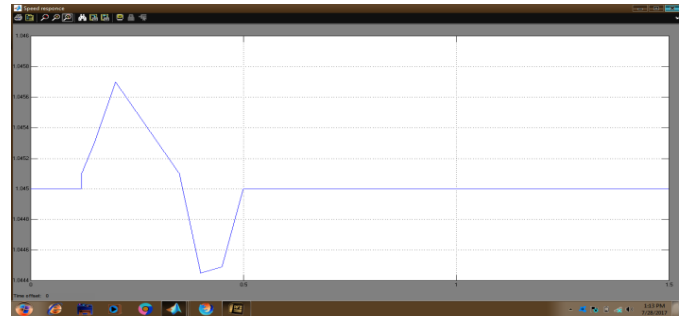


Fig.11 Speed response.

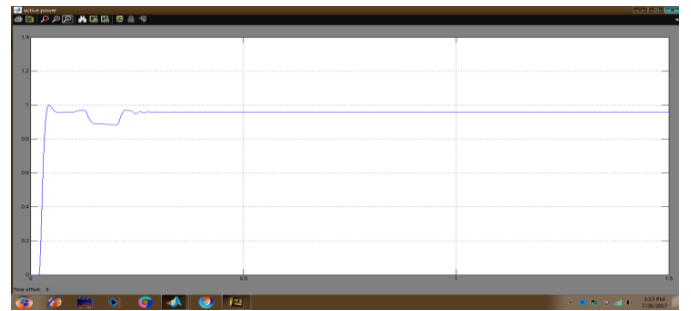


Fig.12 PCC active power responses.

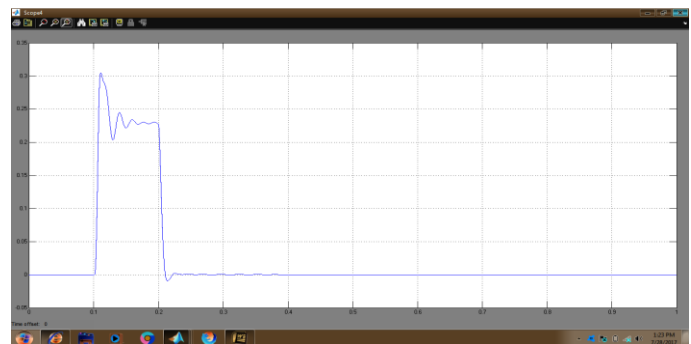


Fig.13 Active power response.



Fig. 14 DC link voltage.

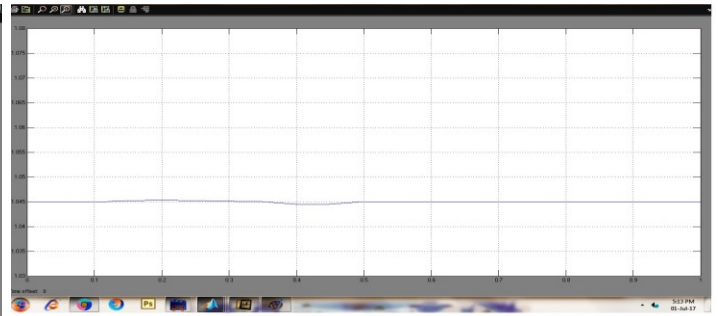


Fig.17 active power

C. BFCL EXTENSION FOR 1LG

In below figures 15,16,17,18 shows BFCL1LG using FLC. It is seen that BFCL can maintain voltage at rated level properly. The BFCL using FLC performance is better than BFCL using PI. The machine speed oscillation is kept to lowest and variation is minimum so machine is well stable with application of BFCL. The output active power fluctuation is lowest and active power demand is highest from fault initiation to breaker opening with application of BFCL. Here DC link voltage retain more stable voltage than BFCL using PI controller.



Fig.18 Dc link voltage.

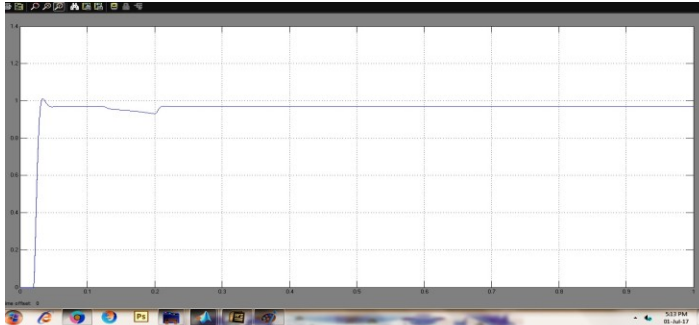


Fig.15 Terminal Voltage

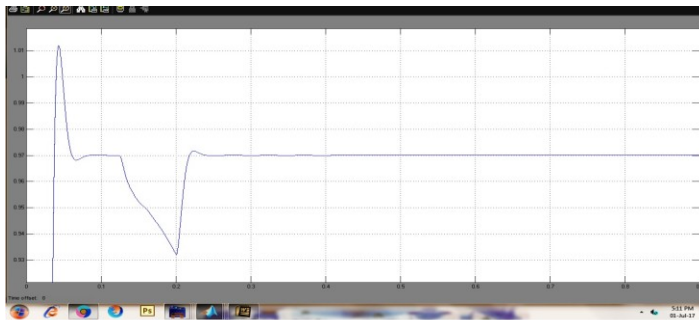


Fig. 16 speed response

D. BFCL EXTENSION 3LG

In below figures 19,20,21,22,23 shows BFCL 3LG using FLC. It is seen that voltage level of BFCL keeps rated nominal value which indicates BFCL is more sensitive and faster respond to fault and gives better voltage stabilization than BFCL using PI controller. The BFCL limits the rate of rising of machine speed and ensures better stability because it totally prevented by application of BFCL using FLC. The output power demand to the machine is lowest with low fluctuation at fault and breaker opening instant. Faster stabilization of output power is also provided with BFCL. It consumes less active power than BFCL using PI controller from fault initiation to breaker opening instant and gives better transient stability. It is also noticeable that BFCL has no active power during normal operation. It is possible to maintain more constant dc link voltage.

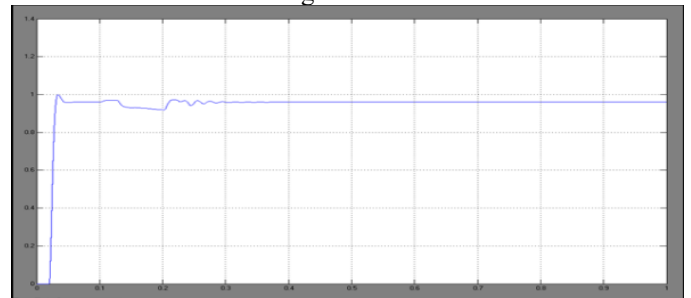


Fig. 19 terminal voltage

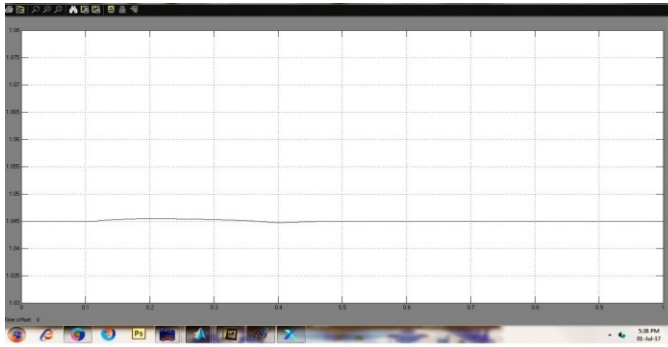


Fig.20 Speed



Fig.21 Active power



Fig.22 active power response

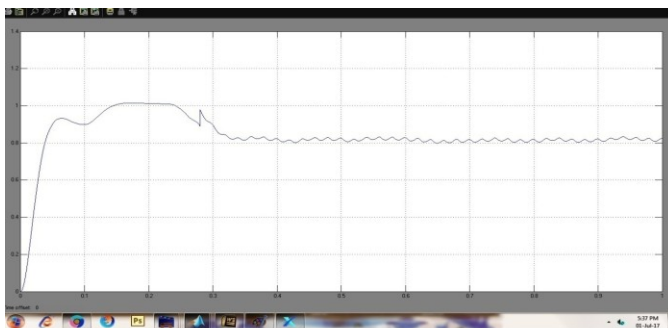


Fig.23 DC link voltage.

VII. CONCLUSION

The application of the BFCL to enhance the transient stability of DFIM is proposed in this paper. The performance of the proposed BFCL is compared with that of the SDBR. From the simulation results, the BFCL is a very effective means to enhance the transient stability of the DFIM-based variable speed wind generator and the BFCL can help the DFIM-based wind farms abide by the grid code requirements. The SDBR is outperformed by the BFCL in every aspect, as seen from graphical results. In the proposed BFCL FLC is used instead of PI controller. The proposed system gives better performance and characteristics compared to existing. In our future study, a high capacity variable speed wind farm connected to a large power system will be considered. Furthermore, an optimal design of the BFCL will be developed considering variable values of the shunt impedance.

VIII. REFERENCES

- [1] P. Musgrove, *Wind Power*. Cambridge, U.K.: Cambridge Univ. Press, 2010.
- [2] B. Singh, P. Jayaprakash, T. R. Somayajulu, and D. P. Kothari, "Reducedrating VSC with a zig-zag transformer for current compensation in a three-phase four-wire distribution system," *IEEE Trans. Power Del.*, vol. 24, no. 1, pp. 249–259, Jan. 2009.
- [3] R. M. Ciric, L. F. Ochoa, A. Padilla-Feltrin, and H. Nouri, "Fault analysis in four-wire distribution networks," *Proc. Inst. Elect. Eng., Gen., Transm. Distrib.*, vol. 152, no. 6, pp. 977–982, 2005.
- [4] J. C. Meza and A. H. Samra, "Zero-sequence harmonics current minimization using zero-blocking reactor and zig-zag transformer," in *Proc. IEEE DRPT*, 2008, pp. 1758–1764.
- [5] H. L. Jou, J. C. Wu, K. D. Wu, W. J. Chiang, and Y. H. Chen, "Analysis of zig-zag transformer applying in the three-phase four-wire distribution power system," *IEEE Trans. Power Del.*, vol. 20, no. 2, pt. 1, pp. 1168–1178, Apr. 2005.
- [6] S. Choi and M. Jang, "Analysis and control of a single-phase inverter zigzag-transformer hybrid

neutral-current suppressor in three-phase four-wire systems,” *IEEE Trans. Ind. Electron.*, vol. 54, no. 4, pp.2201–2208, Aug. 2007

[7] P. La Seta and P. Schegner, “New control scheme for doubly-fed induction generators to improve transient stability,”

[8] P.La Seta and P. Schegner, “Comparison of stabilizing methods for doubly fed induction generators for wind turbines,” in *Proc. Int. Conf. Futur. Power Syst.*, Nov. 2005, Paper W045, Conference CDROM.

[9] M. Rahimi and M. Parniani, “Transient performance improvement of wind turbines with doubly fed induction generators using nonlinear control strategy,” *IEEE Trans. Energy Convers.*, vol. 25, no. 2, pp. 514–525, Jun.2010.

[10] A.D.Hansen and L. H. Hansen, “Wind turbine concept market penetration over 10 years (1995–2004),” *Wind Energy*, vol. 10, pp. 81–97, Jan. 2007.