

# Performance and evaluation of Improved Active Power Filter in Renewable Power Generation Systems for non linear loads

<sup>1</sup>Chinthakindhi Sudheer Babu & <sup>2</sup>G.Venu Gopal

1.M.tech,KBR Engineering College,Pagidipally, Bibi Nagar, Hyderabad. pincode: 508126

2.AssistantProfessoer,KBR Engineering College,Pagidipally, Bibi Nagar, Hyderabad. pincode: 508126

**Abstract:**

An active power filter implemented with a four-leg voltage-source inverter using a predictive control scheme is presented. The use of a four-leg voltage-source inverter allows the compensation of current harmonic components, as well as unbalanced current generated by single-phase nonlinear loads. The compensation performance of the proposed active power filters.

Index Terms—Active power filter; Current control; Predictive control; Fourleg converters.

**I. INTRODUCTION:**

Renewable generation affects power quality due to its nonlinearity, since solar generation plants and wind power generators must be connected to the grid through high power static PWM converters [1]. The non-uniform nature of power generation directly affects voltage regulation and creates volt-age distortion in power systems. This new scenario in power distribution systems will require more sophisticated compen-sation techniques. Although active power filters implemented with three-phase four-leg voltage-source inverters (4L-VSI) have already been presented in technical literature [2]–[6], the primary con tribu-tion of this paper is a predictive control algorithm designed and implemented specifically for this application. Traditionally, active power filters have been controlled using pre-tuned controllers, such as PI-type or adaptive, for the current as well as for the dc-voltage loops [7], [8]. PI controllers must be designed based on the equivalent linear model, while predictive controllers use the non-linear model, which is closer to real operating conditions. An accurate model obtained using

predictive controllers improves the performance of the active power filter, especially during transient operating conditions, because it can quickly follow the current-reference signal while maintaining a constant dc-voltage.

**II. FOUR-LEG CONVERTER MODEL** Both types of power generation use AC/AC and DC/AC static PWM converters for voltage conversion and battery banks for long-term energy storage. These converters perform maximum power point tracking to extract the maximum energy possible from wind and sun. The electrical energy consumption behaviour is random and unpredictable.

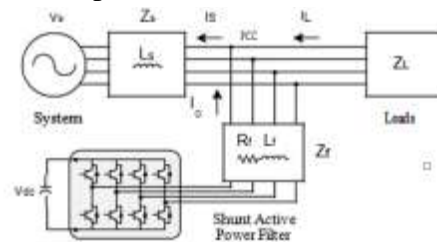


fig 1. Three-phase equivalent circuit of the proposed shunt active power filter.

The voltage in any leg x of the converter, measured from the negative point of the dc-voltage (N), can be expressed in terms of

switching states, as follows equivalent circuit shown in fig 1 is, It is composed by an electrolytic capacitor, a four-leg PWM converter, and a first-order output ripple filter, as shown in Fig.1.

**III DIGITAL PREDICTIVE CURRENT CONTROL** The block diagram of the proposed digital predictive current control scheme is shown in Fig. 2. This control scheme is basically an optimization algorithm and therefore it has to be implemented in a microprocessor. Consequently, the analysis has to be developed using discrete mathematics in order to consider additional restrictions such as time delays and approximations. The main characteristic of predictive control is the use of the system model to predict the future behaviour of the variables to be controlled.

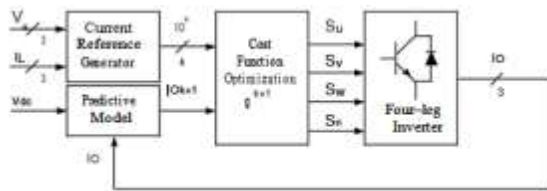


Fig 2..Proposed predictive digital current control block diagram. 1) Current Reference Generator: This unit is designed to generate the required current reference that is used to compensate the undesirable load current components. In this case, the system voltages, the load currents and the dc-voltage converter are measured, while the neutral output current and neutral load current are generated directly from these signals (V). Prediction Model: The converter model is used to predict the output converter current. Since the controller operates in discrete time, both the controller and the system model must be represented in a discrete time domain discrete time model consists of a recursive matrix equation that represents this prediction system. This means that for a given sampling time  $T_s$ ,

knowing the converter switching states and control variables at instant  $kT_s$ , it is possible to predict the next states at any instant in order to predict the output current  $i_o$  at the instant  $(k+1)$ , the input voltage value  $v_o$  and the converter output voltage  $v_{xN}$ , are required. The algorithm calculates all 16 values associated with the possible combinations that the state variables can achieve. 3) Cost Function Optimization: In order to select optimal switching state that must be applied to the power Converter

**IV CURRENT REFERENCE GENERATOR:**

A dq-based current reference generator scheme is used to obtain the active powerfilter current reference signals. The scheme presents a fast and accurate signal tracking capability. The dq-based scheme operates in a rotating reference frame; therefore, the measured currents must be multiplied by the  $\sin(\omega t)$  and  $\cos(\omega t)$  signals. By using dq transformation, the d current component is synchronized with the corresponding phase-to-neutral system voltage and the q current component is phase-shifted by  $90^\circ$ . The  $\sin(\omega t)$  and  $\cos(\omega t)$  synchronized reference signals are obtained from a Synchronous Reference Frame (SRF) PLL.



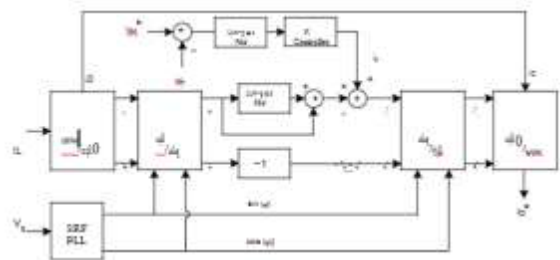


Fig 3..dq-based Current Reference Generator Block Diagram . V DC-voltage Control The dc-voltage converter is controlled with a traditional PI controller



**RESULTS** The Grid Voltage, Grid Current, Load current and inverter current.

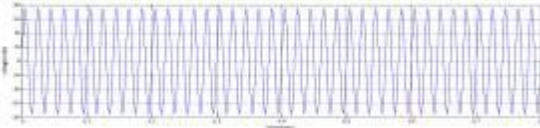

Fig(A)

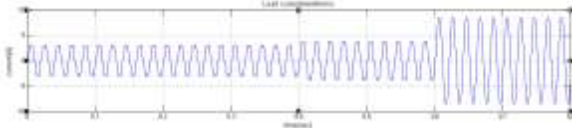


Fig (B)




Fig c



Fig D



Fig(E)

Figure: Simulated waveforms of the proposed control scheme. (a) Phase to neutral source voltage. (b) Load Current. (c) Active power filter output current. (d) Load neutral current. (e) System neutral current A Six Pulse rectifier was selected as a nonlinear load in order to verify the effectiveness of the current harmonic compensation. A step load change was applied to evaluate the stability of the dc-voltage. Finally, an unbalanced load was used to validate the performance of the neutral current compensation

**CONCLUSION** Improved dynamic current harmonics and a reactive power compensation scheme for power distribution systems with generation from renewable sources has been proposed to improve the current quality of the distribution system. Advantages of the proposed scheme are related to its simplicity, modeling

and implementation. The use of a predictive control algorithm for the converter current loop proved to be an effective solution for active power filter applications, improving current tracking capability, and transient response. Simulated and experimental results have proved that the proposed predictive control algorithm is a good alternative to classical linear control methods. The predictive current control algorithm is a stable and robust solution. Simulated and experimental results have shown the compensation effectiveness of the proposed active power filter.

**REFERENCES:**

[1] J. Rocabert, A. Luna, F. Blaabjerg, and P. Rodriguez, "Control of power converters in ac microgrids," *Power Electronics, IEEE Transaction on*, vol. 27, no. 11, pp. 4734–4749, nov 2012.

[2] M. Aredes, J. Hafner, and K. Heumann, "Three-phase four-wire shunt active filter control strategies," *Power Electronics, IEEE Transactions on*, vol. 12, no. 2, pp. 311–318, March 1997.

[3] S. Naidu and D. Fernandes, "Dynamic voltage restorer based on a fourleg voltage source converter," *Gener. Transm. Distrib., IET*, vol. 3, no. 5, pp. 437– 447, May 2009.

[4] N. Prabhakar and M. Mishra, "Dynamic hysteresis current control to minimize switching for three-phase four-leg vsi topology to compensate nonlinear load," *Power Electronics, IEEE Transactions on*, vol. 25, no. 8, pp. 1935–1942, August 2010.

[5] V. Khadkikar, A. Chandra, and B. Singh, "Digital signal processor implementation and performance evaluation of split capacitor, fourleg and three h-bridgebased three-phase four-wire shunt active filters," *Power Electronics, IET*, vol. 4, no. 4, pp. 463–470, April 2011.

[6] F. Wang, J. Duarte, and M. Hendrix, "Gridinterfacing converter systems with enhanced voltage quality for microgridapplication;concept and implementation," *Power Electronics, IEEE Transactions on*, vol. 26, no. 12, pp. 3501–3513, dec. 2011.

[7] X. Wei, "Study on digital pi control of current loop in active power filter," *Electrical and Control Engineering (ICECE)*, 2010 International Conference on, pp. 4287–4290, June 2010.

[8] R. de AraujoRibeiro, C. de Azevedo, and R. de Sousa, "A robust adaptive control strategy of active power filters for power-factor correction, harmonic compensation, and balancing of nonlinear loads," *Power Electronics, IEEE Transactions on*, vol. 27, no. 2, pp. 718 –730, feb. 2012.

[9] J. Rodriguez, J. Pontt, C. Silva, P. Correa, P. Lezana, P. Cortes, and U. Ammann, "Predictive current control of a voltage source inverter," *Trans. Ind. Electron., IEEE*, vol. 54, no. 1, pp. 495–503, February 2007.