

# Iot Based Smart Healthcare System

A.Alani & K .Prabhakara Rao

Department of Electronics & Communication Engg B.V. Raju Institute of Technology NARSAPUR, Medak District  
[alaniabhi@gmail.com](mailto:alaniabhi@gmail.com) & [prabhakar.kapula@gmail.com](mailto:prabhakar.kapula@gmail.com)

## ABSTRACT

The rapid development of Internet of things (IoT) technology makes it possible for connecting various smart objects together through the Internet and providing more data interoperability methods for application purpose. Recent research shows more potential applications of IoT in information intensive industrial sectors such as healthcare services. However, the diversity of the objects in IoT causes the heterogeneity problem of the data format in IoT platform. Meanwhile, the use of IoT technology in applications has spurred the increase of real-time data, which makes the information storage and accessing more difficult and challenging. Here in this paper a more efficient machine to machine communication is achieved for health care data's.

**Key Terms:-** Internet of Things (IOT), Machine to Machine communication (M2M), EoR.

## INTRODUCTION

In the last decade, a growing number of researches have been conducted toward using IoT technology to acquire data ubiquitously, process data timely, and distribute data wirelessly in the healthcare field Ambient Assisted Living (AAL) is designed to support daily activities of elderly people independently as long as possible. IoT technology is used to support medical consultations among rural patients, health workers, and urban city specialists. With the use of IoT, M-health concept, which is defined as mobile computing, medical sensors, and communication technologies for healthcare, attracts more and more researchers applying fourth-generation (4G) mobile communication technology and IoT in healthcare service.

The above-mentioned uses of IoT technology bring both opportunity and challenges in ubiquitous data accessing medical services. More attentions have been paid in developing ubiquitous data accessing solutions to acquire and process data in decentralized data sources the software adaptation approaches are surveyed in ubiquitous computing for resource constrained devices to react to the changes of user requirements actively and transparently control functionalities are designed to coordinate hybrid wireless networks in cloud computing. a metro system based on data-centric middleware is simulated to publish/subscribe message remotely.

I researchers use publish/subscribe-based middleware to disseminate sensor data in cyber-physical systems. A cloud platform is developed in to handle heterogeneous physiological signal data to provide

personalized healthcare services. In the related research, clinical data heterogeneity is still the main obstacle that hinders the clinic data integration and interoperation. Recently, Restful (Representational State Transfer) resource oriented model has been extended from a kind of software architecture originated from Web service research mainly for Web service interoperation to Web resources management. In this research an efficient interoperability of medical data through Internet of things is explained and successfully shown how it is helpful to patients and doctors. The rest parts of the paper are organized as follows. In Section II, interfacing of components of different parameters to be measured is discussed. In

## Projectobjective:-

These physiological conditions of the patients are forwarded using serial module and if there is any change occurs in this continuously monitored data then an alert sound is directly forwarded to the care taker. A survey of E- healthcare information focuses on the very significant issue in the healthcare monitoring system that is to monitor and optimize the data quality extracted from environment, which can improve the diagnostics and decision making. Realtime Interactive medical consultation uses CARA (Context Aware Real Time Monitoring System) to continuously keep an eye on the physiological parameters of the patient and then either to store the data on server or stream the data to remote location in real-time. The system also uses webcam for real time monitoring of the patient.

**Projectscope:-**E-Healthcare information focuses on the very significant issue in the healthcare monitoring system that is to monitor and optimize the data quality extracted from environment, which can improve the diagnostics and decision making.

**Project outline:-**The project is organized into 6 chapters, namely introduction, Literature Review, Design approach, Result analysis and conclusion. Chapter 2 contains the complete details about the Introduction of Embedded Systems and Microcontroller. Chapter 3 describes about the design issues, software and hardware requirements for the



Implementation of agricultural automation through webpage Chapter 4 consists of the result analysis, applications and advantages. Chapter 5 contains coding and chapter 6 contains conclusion and proposed works to enhance the project in the future.

## LITERATURE REVIEW

**Proliferating Cloud Density through Big Data Ecosystem,-**Novel XCLOUDX Classification and Emergence of as-a-Service Era Big Data is permeating through the bigger aspect of human life for scientific and commercial dependencies, especially for massive scale data analytics of beyond the Exabyte magnitude. As the footprint of Big Data applications is continuously expanding, the reliability on cloud environments is also increasing to obtain appropriate, robust and affordable services to deal with Big Data challenges. Cloud computing avoids any need to locally maintain the overly scaled computing infrastructure that include not only dedicated space, but the expensive hardware and software also. Several data models to process Big Data are already developed and a number of such models are still emerging, potentially relying on heterogeneous underlying storage technologies, including cloud computing. In this paper, we investigate the growing role of cloud computing in Big Data ecosystem. Also, we propose a novel XCLOUDX {Clouds, X...X} classification to zoom in to gauge the intuitiveness of the scientific name of the cloud-assisted NoSQL Big Data models and analyze whether XCloudX always uses cloud computing underneath or vice versa. XCloudX symbolizes those NoSQL Big Data models that embody the term "cloud" in their name, where X is any alphanumeric variable. The discussion is strengthened by a set of important case studies. Furthermore, we study the emergence of as-a-Service era, motivated by cloud computing drive and explore the new members beyond traditional cloud computing stack, developed over the last few years.

**Conference on Advances in Communication and Control Systems:-** The advanced development in wireless sensor networks can be used in monitoring various parameters in agriculture. Due to uneven Natural distribution of rain water it is very difficult for farmers to monitor and control the distribution of water to agriculture field in the whole farm or as per the requirement of the crop. There is no ideal irrigation method for all weather conditions, soil structure and variety of crops cultures. Farmers suffer large financial

losses because of wrong prediction of weather and incorrect irrigation methods. In this context, with the evolution of miniaturized sensor devices coupled with wireless technologies, it is possible remotely monitor parameters such as moisture, temperature and humidity. In this paper it is proposed to design, develop and implement wireless sensor network connected to a central node using ZigBee, which in turn is connected to a Central Monitoring Station (CMS) through General Packet Radio Service (GPRS) or Global System for Mobile (GSM) technologies. The system also obtains Global Positioning System (GPS) parameters related to the field and send them to a central monitoring station. This system is expected to help farmers in evaluating soil conditions and act accordingly.


**Low Cost Hardware Design of a Web Server for Home Automation Systems:-**In the present scenario the world is moving towards automated systems. To design a hardware which is able to interact via internet is a challenging task in design of any automation system. A new term known as 'Internet of things' also faces the same kind challenge, of interfacing a dumb electronic terminal with the internet. As we know that Ethernet is the most preferred serial bus, and can be utilized for high speed data transmission system. In this paper a new kind of design is proposed which support's bi-directional data transmission. This approach require very low cost hardware units including 8 bit RISC processors, Ethernet controller, Ethernet adaptor, sensor's and actuating device like webcam or may be a motor, based on the type of application. The processor to be used can be AVR or PIC depending upon the availability. The main advantage of this design is that it does not require any pre-defined operating platform like Linux or Python.

**A New Intelligent Remote Control System for Home Automation and Reduce Energy Consumption",-** design and implementation of an internet-based smart remote control system for home automation, dedicated to power management that adapts power consumption to available power resources according to user comfort and cost criteria. Sensors and home appliances are connected to the designed and implemented control panel and then they are monitored and controlled from every corner of the world through the Internet cloud. The system is scalable and allows additional appliances to be added to it with no major changes to its core. New communication format is proposed to enable communication between the control panel and the servers well. To verify the principle operation of the

design, some home applications are experimentally tested. Experimental results show the efficiency and accuracy of proposed intelligent control system in terms of energy saving and being user friendly.

**“Pervasive medical information management and services:-**A confluence of developments has led to the possibility of realizing a vision of pervasive healthcare. These include, but are not limited to, society becoming increasingly mobile, dramatic advances in various areas of technology and computer science, exponentially increasing healthcare costs coupled with workforce issues, the need to provide effective and efficient healthcare, and the change in the makeup of leading diseases most notably the increase in non-communicable (or chronic) diseases. This is actually a very exciting time in healthcare delivery and one of the major Challenges are to prudently adopt and implement appropriate pervasive healthcare solutions. To do this successfully, naturally requires a full appreciation of the key considerations in pervasive computing and healthcare; in particular, an appreciation of network healthcare operations. The objective of this chapter is to provide such a Holistic perspective.

**Microcontroller:-**

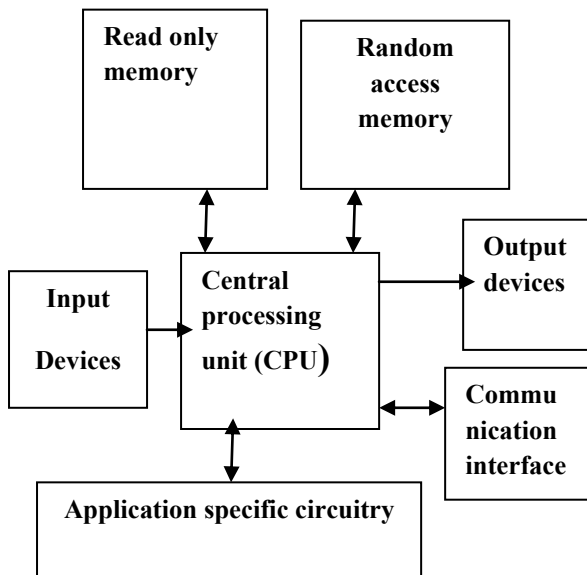

**Applications:-**


Microcontroller applications are

- Cell phones.
- Computers.
- Robots.
- Interfacing to two pc.
- Laptops


**DESIGN APPROACH AND SYSTEM ARCHITECTURE**

IOT Health Care Monitoring System It contains transmitter and receiver sections the below figure shows the transmitter block diagram of IOT Health Care Monitoring System.

**Transmitter:-**

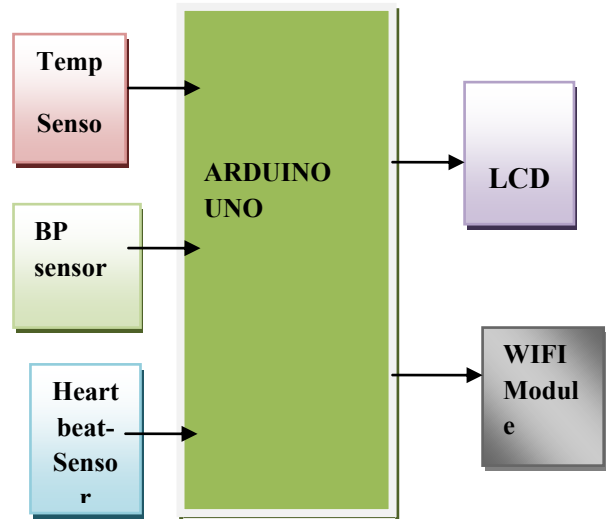

**Receiver:**

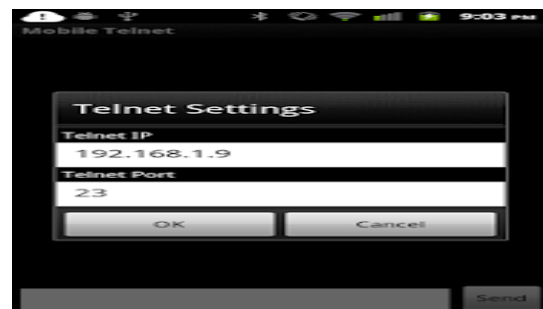

**Working of the project:-**


IOT patient monitoring has 3 sensors. First one is a temperature sensor, second is Heartbeat sensor and the third one is blood pressure sensor. This project is very useful since the doctor can monitor patient health parameters just by visiting website or URL. And nowadays many IOT apps are also being developed. So

now the doctor or family members can monitor or track the patient health through the trough web operate

To operate IOT based health monitoring system project, you need a Wi-Fi connection. The microcontroller or the Arduino board connects to the Wi-Fi network using a Wi-Fi module. This project will not work without a working Wi-Fi network. You can create a Wi-Fi zone using a Wi-Fi module or you can even create a Wi-Fi zone using Hotspot on your Smartphone. The Arduino UNO board continuously reads input from these 3 senses. Then it sends this data to the cloud by sending this data to a particular URL/IP address. Then this action of sending data to IP is repeated after a particular interval of time. For example in this project, we have sent data after every 30 seconds.

The Arduino UNO board continuously reads input from these 3 senses. Then it sends this data to the cloud by sending this data to a particular URL/IP address. Then this action of sending data to IP is repeated after a particular interval of time. For example in this project, we have sent data Fig. after every 30 seconds

**System Architecture:-**We have proposed a robust health monitoring system that is intelligent enough to monitor the patient automatically using IOT that collects the status information through these systems which would include patient's heart rate, blood pressure and ECG and sends an emergency alert to patient's doctor with his current status and full medical information. This would help the doctor to monitor his patient from anywhere and also to the patient to send his health status directly without visiting to the hospital. Our model can be deployed at various hospitals and medical institutes. The system uses smart sensors that generates raw data information collected from each sensor and send it to database server where the data can be further analyzed and statistically maintained to be used by the medical experts. Maintaining a database server is a must so that there is even track of previous medical record of the patient providing a better and improved examine

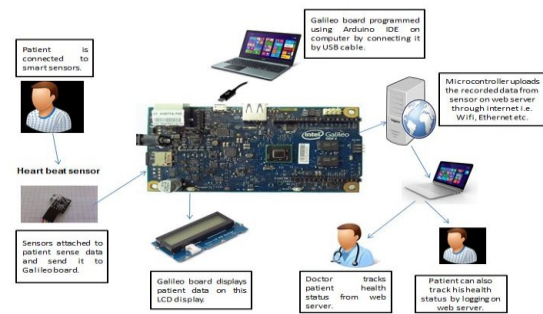

**Hardware:** The brain of our model is the 2nd generation Intel Galileo board, a single board which is based on the Intel QuarkSoCX1000, a 32-bit Intel Pentium processor- class system on a chip (SoC). It is Arduino-certificated and designed to be hardware, software, and pin compatible with large range of Arduino Uno R3 shields. Intel Galileo board is preferred over Arduino because this provides a Linux platform with high processing and computing power within build Ethernet shield and SD card support. It gets the information. This brain collects the data from all the sensors connected to the patient and uploads this data on the web server via Ethernet. The doctor can keep track of all the patient's data through the web client.



**Components used**

**Software:-**The Software part includes an Arduino IDE which is needed to program our Intel Galileo Board which was used to upload our final code of maintaining a database. All the data connected to the sensors is sent to a Xampp based data base server to log the patient timely record or sensed data, which will help the doctor for better consulting and prescription to patient. More over these datasets stored in database are used to plot graph for each of the sensors are shown. The server has an option for uploading the database of the patients with their details and their medical history. The data server can be accessed any time by the doctor and the doctor can also see the current live feed of the patient's medical



condition. A track of patient's health record is also maintained for future reference on the webportal. The portal also has the option to maintain and track the 24-Hour records of multiple patients. The patient can also see his/her medical details on the web portal.

## SOFTWARE IMPLEMENTAION

The software's used for this project are:


Arduino IDE

Language: C /C++

## Thing speak:-

**Create a Channel:-** Sign In to Thing Speak™ using either your Math Works® Account or Thing Speak account, or create a new Math Works account.

Click **Channels > My Channels**

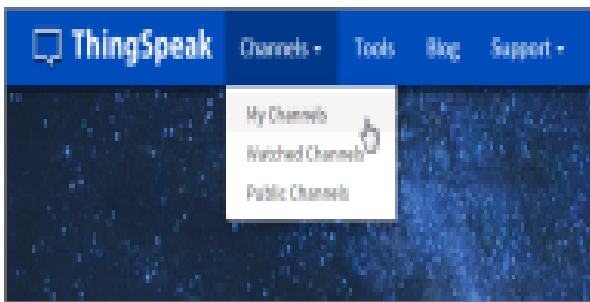

On the Channels page, click **New Channel**.

Check the boxes next to Fields 1–3. Enter these channel setting values:

- **Name:** Dew Point Measurement
- **Field 1:** Temperature (F)

**Field 2:** Humidity

## HARDWARE TOOLS

In this project the hardware requirements are following:

Arduino UNO microcontroller

Temperature Sensor


LCD display

Finger print sensor

Blood Pressure sensor

Wi-Fi module (ESP8266)


## ESP8266 Schematic:-

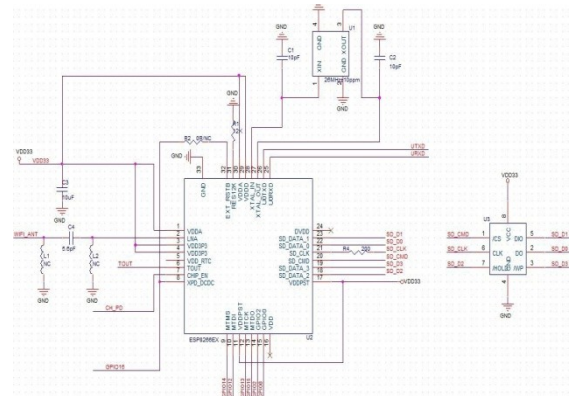

## Application of ESP8266

- Smart power plugs
- Home automation
- Mesh network
- Industrial wireless control
- Baby monitors
- IP Cameras
- Sensor networks
- Wearable electronics
- Wi-Fi location-aware devices
- Security ID tags
- Wi-Fi position system beacons

**Description:** The ESP8266 Wi-Fi Module is a self contained SOC with integrated TCP/IP protocol stack that can give any microcontroller access to your Wi-Fi network. The ESP8266 is capable of either hosting an application or offloading all Wi-Fi networking functions from another application processor. Each ESP8266 module comes pre-programmed with an AT command set firmware, meaning, you can simply hook this up to your Arduino device and get about as much Wi-Fi-ability as a Wi-Fi Shield offers (and that's just out of the box)! The ESP8266 module is an extremely cost effective board with a huge, and ever growing, community.

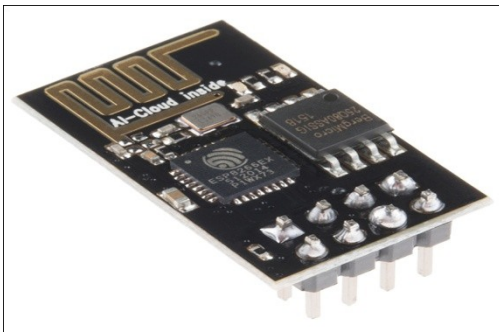


This module has a powerful enough on-board processing and storage capability that allows it to be integrated with the sensors and other application specific devices through its GPIOs with minimal development up-front and minimal loading during runtime. Its high degree of on-chip integration allows for minimal external circuitry, including the front-end module, is designed to occupy minimal PCB area. The ESP8266 supports APSD for VoIP applications and Bluetooth co-existence interfaces, it contains a self-calibrated RF allowing it to work under all operating conditions, and requires no external RF parts.

## RESULTS

Deployed and tested over a patient whose personal details are entered into the web portal. The patient is connected with uorhealth monitoring system which consists of a heart rate sensor and temperature sensor. The live graph of the patient's the proposed intelligent health monitoring system is being heart rate and temperature is being monitored on a Xampp based database server. The IOT device used here is Intel Galileo board. The system architecture of the proposed model is explained by the given below figures which includes a server connected Intel Galileo board that uploads the data received by the sensors onto the database and statistical graphs are being plotted for further analysis and recording. The index or the Home page of the the web portal consists of various tabs including the Login, Services,




**System web portal design**

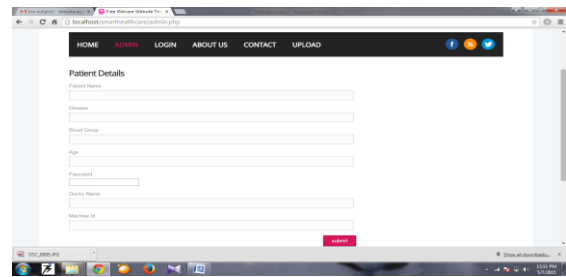


**System web portal Admin Page**

The Admin page of the web portal allows the user to enter the personal details of the patient including his name, age, blood group and various other essential details in order to maintain their cords systematically.

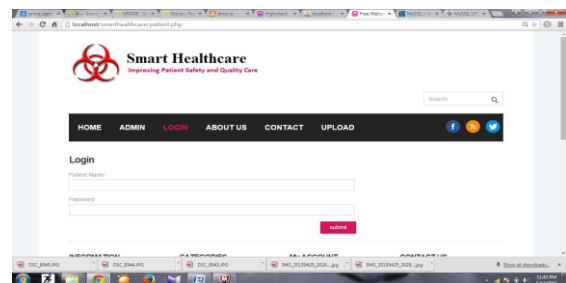

**System web portal Login Page**

In the Login tab, the user can login into the web portal as patient or as the doctor as per the credentials given.

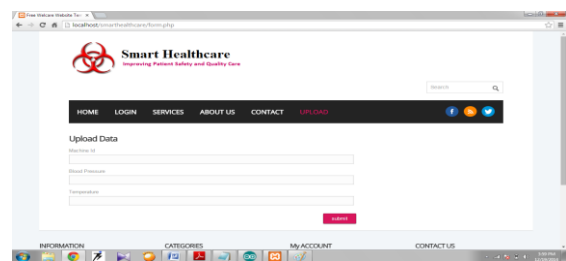


**System web portal upload data tab**

System web portal upload data tabbing the Upload tab, the doctor can manually upload the blood Pressure and the temperature of a patient with a specific machined so as to maintain the records for future purposes.

(Recent tables) ...					
	mid	pmin	pmax	temp	time
New					
healthcare					
New					
admin					
details					
information_schema					
mysql					
performance_schema					
test					
m1	80	103	36	16:19:55	000000
m1	80	103	36	16:20:18	000000
m1	80	103	36	16:20:41	000000
m1	80	103	36	16:21:04	000000
m1	80	103	36	16:21:27	000000
m1	80	103	36	16:21:49	000000
m1	80	103	36	16:22:12	000000
m1	80	103	36	16:22:35	000000
m1	80	103	36	16:22:56	000000
m1	80	103	36	16:23:18	000000
m1	80	103	36	16:23:40	000000
m1	80	103	36	16:24:03	000000
m1	80	102	36	16:24:26	000000
m1	80	103	36	16:24:52	000000
m1	80	103	36	16:25:14	000000
m1	80	103	36	16:25:36	000000
m1	80	103	36	16:25:59	000000
m1	80	102	36	16:26:20	000000
m1	80	103	36	16:26:42	000000
m1	80	103	36	16:27:04	000000
m1	80	102	36	16:27:27	000000


### System web portal uploading data

The data from various sensors are being uploaded into the database server from which the data is further used to plot graphs and analyze the health reports.

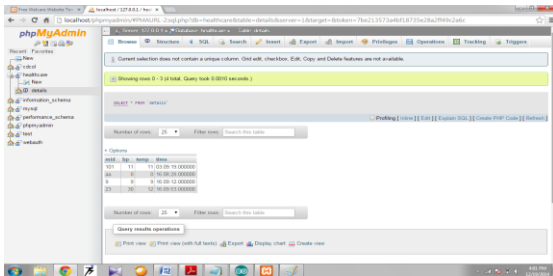

### System web portal database server

This figure shows the full structure of the database which is being hosted currently on the local host and further can be connected to the whole world via IOT. The database has full details and record history of each and every patient through which a statistical graph is plotted in real time which is used for patients further analysis and tracking. The model is finally deployed over a normal fit person another heart rate and temperature details are plotted on a real time graph. An example output of a proposed health monitor device is shown in which the patient's personal details are shown and her live heart rate and body temperature is being traced in real time.

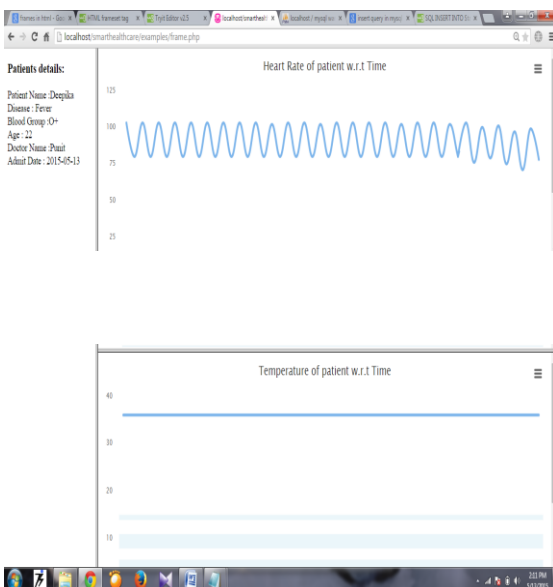

An Example Health Monitor graph

## CONCLUSION

The developed system in the presented work is low cost, and light weight. It consists of sensing nodes. These nodes can be strategically placed on the human body and capable of creating a wireless sensor network (WSN) to monitor various physiological parameters. These parameters can be monitored for a long period of time and provide real-time feedback to the user and medical staff. The system is also capable of providing reliable and secure communication. A successful interaction among the Arduino UNO microcontroller and the different sensors fitted on the kit is achieved. The system further promises to revolutionize the health care monitoring approach. In this work temperature sensors are used to collect physiological data from patients. This healthcare monitoring sends an emergency notification message to the friends or relatives if any patient's health condition is critical.

## ADVANTAGE OF THIS PROJECT

IOT Monitoring proves really helpful when we need to monitor & record and keep track of changes in the health parameters of the patient over the period of time. So with the IOT health monitoring, we can have the database of these changes in the health parameters. Doctors can take the reference of these changes or the history of the patient while suggesting the treatment or the medicines to the patient. Hospital stays are minimized due to Remote Patient Monitoring. Hospital visits for normal routine checkups are minimized. Patient health parameter data is stored over the cloud. So it is more beneficial than maintaining the records on printed papers kept in the files. Or even the digital records which are kept in a particular computer or laptop or memory device like pen-drive. Because there are chances that these devices can get corrupt and data might be lost. Whereas, in case of IOT, the cloud storage is more reliable and does have minimal chances of data loss.

## FUTURE DEVELOPMENT:

We can add a GPS module in IOT patient monitoring using Arduino Uno and wifi module project. This GPS module will find out the position or the location of the patient using the longitude and latitude received. Then it will send this location to the cloud that is the IOT using the Wi-Fi module. Then doctors can find out the position of the patient in case they have to take some preventive action.



## REFERENCES

- [1] <https://cooey.co.in/>
- [2] <https://www.healthvault.com/in/en/overview>
- [3] Sharma S, Tim US, Gadia S, Wong J. "Proliferating Cloud Density through Big Data Ecosystem, Novel XCLOUDX Classification and Emergence of as-a-Service Era".pp.-1-20 (2015)
- [4] Rintala, Mikko, Jussi Sormunen, Petri Kuisma, and Matti Rahkala. "Automation System Products and Research."(2014).
- [5] Sandeep Patel, Punit Gupta, Mayank Kumar Goyal, "Low Cost Hardware Design of a Web Server for Home Automation Systems", Conference on Advances in Communication and Control Systems (CAC2S), 2013
- [6] Golzar, M.G. ; AsanPardazan Co. ; Tajozzakerin, H.R., "A New Intelligent Remote Control System for Home Automation and Reduce Energy Consumption", Mathematical/Analytical Modeling and Computer Simulation (AMS), 2010, IEEE.
- [7] Alkar, A.Z., Hacettepe Univ; Roach, J. ; Baysal, D., "IP based home automation system", Consumer Electronics, IEEE Transactions on (Volume: 56, Issue: 4), November 2010, IEEE
- [8] Al-Ali, A.R., AL-Rousing, M., "Java-based home automation system", Consumer Electronics, IEEE Transactions on (Volume: 50, Issue: 2), May 2004, IEEE
- [9] Sharma S. "Evolution of as-a-Service Era in Cloud". arrive preprint arrive: 1507.00939. 2015 Jun 29.
- [10] Sugam Sharma, U S Tim, Shashi Gadia, and Johnny Wong.(2015).Growing Cloud Density & asaService Modality and OTH Cloud Classification in IOT Era.(<http://www.public.iastate.edu/~sugamsha/articles/OTHCloud%20in%20IoT.pdf>)
- [11] X. D. Wu, M. Q. Ye, D. H. Hu, G. Q. Wu, X. G. Hu, and H. Wang, "Pervasive medical information management and services: Key techniques and challenges," Chin. J. Compute., vol. 35, no. 5, pp. 827–845, May 2012.
- [12] R. L. Riches son and J. Krischer, "Data standards in clinical research: Gaps, overlaps, challenges and future directions," J Amer. Med. Informant. Assoc.,vol. 14, no. 6, pp. 687–696, 2007.
- [13] L. Wang, G.-Z. Yang, J. Huang, J. Zhang, L. Yu, Z. Nie et al., "A wireless biomedical signal interface system-on-chip for body sensor networks," IEEE Trans. Biomed. Circuits Syst., vol. 4, no. 2, pp. 112–117, Apr. 2010.
- [14] R. Gadwall and S. Sonkusale, "Input-feature correlated asynchronous analog to information converter for ECG monitoring," IEEE Trans. Biomed. Circuits Syst., vol. 5, no. 5, pp. 459–468, Oct. 2011.
- [15] A. Dohr, R. Modre-Osprian, M. Droids, D. Hayne, and G. Schreyer, "The Internet of things for ambient assisted living," in Proc. 7th Int. Conf. Inf. Technol., New Gener., 2010, pp. 804–809.
- [16] O. S. Adewale, "An internet-based telemedicine system in Nigeria," Int. J. Inf. Manag., vol. 24, no. 3, pp. 221–234, Jun. 2004.
- [17] R. S. H. Istepanian and Y.-T. Zhang, "Guest editorial introduction to the special section: 4 G health—The long-term evolution of m-health," IEEE Trans. Inf. Tech. Biomed., vol. 16, no. 1, pp. 1–5, Jan. 2012.
- [18] R. Kyusakov, J. Eliasson, J. Delving, J. V. Deventer, and J. Gustafson, "Integration of wireless sensor and actuator nodes with IT infrastructure using service-oriented architecture," IEEE Trans. Ind. Informal., vol. 9, no. 1, pp. 43–51, Feb. 2013.
- [19] K. Wang, X. Bay, J. Li, and C. Ding, "A service-based framework for pharmacogenomics data integration," Enter. Inf. Syst., vol. 4, no. 3, pp. 225–245, 2010.
- [20] N. Pereira, B. Andersons, and E. Tovar, "WiDom:Adominance protocol for wireless medium access," IEEE Trans. Ind. Informal., vol. 3, no. 2, pp. 120–130, May 2007.