

Optimization of Parameter of a Mono Parabolic Leaf Spring by using Design of Experiment

Pradip Sen¹, Mr. Nirvikar Gautam², Mr. Piyush Rai³

^{1,2,3}(M. Tech Scholar, Assistant Professor, Assistant Professor, Department of Mechanical Engineering, VEC Lakhanpur, C.G. - India)

ABSTRACT

Since last few decades many researchers worked on the analysis of suspension system. In our research work we consider the mono parabolic leaf spring of mini truck which having gross vehicle weight of 1550 Kg. The thickness of parabolic leaf spring is varying from middle to the both eye end of the spring. Thickness is more at the middle and it continues reduced with the length of spring. The analysis and modeling of parabolic leaf spring (PLS) is done in CATIA V5 by using the part design and analysis workbench. The FEA is performed by creating the discrete model of PLS and applying the same boundary condition as actual working under the static loading condition. The result obtained by the FEA shows that the critical area where the stress concentration is higher is near to the shackle and it may be the lead to the failure.

The DOE is performed to understand the behavior of the stress and deflection by varying the parameter as camber, leaf spring, thickness and width of the PLS. These studies lead us to find out most optimum configuration of parameter under the given boundary condition.

Keywords – CAE (Computer Aided Engineering), CATIA (Computer Aided Three Dimensional Interactive Application), CAD (Computer Aided Design), DOE (Design of Experiment), FEA (Finite Element Analysis), PLS (Parabolic Leaf Spring).

1. INTRODUCTION

Design and development of a parabolic leaf spring is a long and time taking process which requires number of experiment to validate the design variables. We have used CAE to shorten this development thereby reducing the tests. A systematic procedure is obtained where CAE and tests are used together. CAE simulations are widely used in the auto industries. In fact, their use has enabled the automakers to reduce product development cost and time while improving the safety, comfort and durability of the vehicles they produce. In this research work parabolic leaf spring of a mini-loader

truck has taken into consideration. The objective of this work is to carry out computer aided design and analysis of a conventional leaf spring. The material of the leaf spring is 55Si2Mn90. The Solid modeling and FEA of the leaf spring is done in CATIA V5.

The basic problem which is encountered in parabolic leaf spring is the change in the dimensions of camber and leaf span due to frequent loading and continuous running of the mini loader truck. The basic observation carried out in this thesis is regarding the decrease in the leaf span and increase in the camber after a period of time. This acts as a limitation to spring action. Hence it becomes very essential to restore the spring action to the initial level. This is because the spring is always loaded and the load on it may be due to the cargo or due to its own weight. It is observed that due to the change in dimensions of camber and leaf span there is a decrease in the amount of comfort level both to the rider and the cargo loaded on it. After continuous running of the automobile the portion of PLS near the shackle tends to weaken in a sense that the thickness is reduced which ultimately results in high stress concentration. This is a cumulative effect and after certain period of time the PLS fails. The objective initially is to study the behavior of a PLS under static loading conditions by varying the camber, leaf span, width and thickness.

2. MATERIAL

The basic requirements of a leaf spring steel is that the selected grade of steel must have sufficient harden ability for the size involved to ensure a full martenstic structure throughout the entire leaf section. In general terms higher alloy required to ensure adequate harden ability when the thick leaf sections are used. The material used for the experimental work is 55Si2Mn90. The other

designation of this material is shown in Table-1 and its chemical compositions are shown below in Table -3.

Table 1 – Nomenclature corresponding to current PLS

Internatio nal Standard	Equivalent Grades			
	IS	DIN	BS	AISI
EN45	55Si2Mn90	55Si7	250A53	9255

Many industries manufacture parabolic leaf springs by EN45 material. These materials are widely used for production of parabolic leaf springs and conventional multi leaf spring. Leaf spring absorbs the vertical vibrations, bumps loads (induced due to road irregularities) and shocks by means of spring deflection, so that the potential energy stored in the leaf spring and then relieved slowly. Ability to store and absorb more amount of strain energy insures the comfortable suspension system.

3. DESIGN PARAMETER

Dimensional parameters of the parabolic steel leaf spring used are shown in Table - 2.

Table 2 – Material Properties of existing PLS

PARAMETER	VALUE
Material selected - steel	55Si2Mn90
Young’s Modulus (E)	200GPa
Poission’s Ratio	0.3
Tensile Strength Ultimate	1962 MPa
Tensile Strength Yield	1500 MPa
Leaf Span	1025 mm
Camber	90.81 mm
Thickness	6.35 mm
Width	60 mm
Density	7850 kg/m ³
Thermal Expansion	11x10 ⁻⁶ / °C

Table 3 – Composition of various elements in 55Si2Mn90

CAD MODELING

CAD model is one of the most important things in FEA because it affects directly the result of output value FEA analysis. So modeling of any geometry in CAD software should required proper attention. In this project work modeling of PLS has done by using the part design workbench and 2D sketch of PLS is initially created and then we convert this 2D sketch into a 3D model by applying the multi section solid tool in design workbench. The parameter of PLS of this 3D model has been cross checked with the existing model of spring by using drawing and

Grade	C %	Si %	Mn %	Cr %	Mo %	P %	S %
55Si2Mn90	0.55	1.74	0.87	0.1	0.02	0.05	0.05

drafting of PLS.

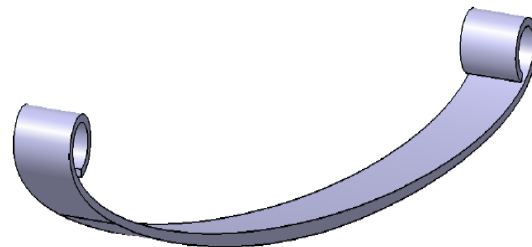


Figure – 1 CAD Model of PLS

4. RESULT FROM FEA, DESIGN OF EXPERIMENT & SIMULATED ANNEALING ALGORITHM

Result From Existing Model: The CAD model of leaf spring is analyzed in CATIA V5R20. For the analysis of stress and displacement one eye end is kept fixed and the other is maintained at sliding contact. The load is applied at the center of the parabolic leaf spring of amount 3800 N in vertically upward direction. And mechanical properties for 55Si2Mn90 are defined in CATIA V5R20 as mentioned above. In this parabolic tetrahedron element with element size 10 mm and absolute sag of 2 mm is considered.

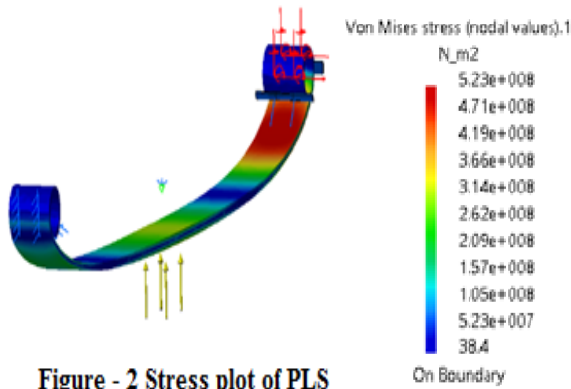


Figure - 2 Stress plot of PLS

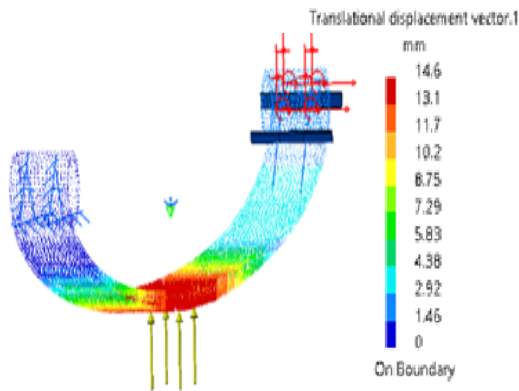


Figure - 3 Deflection plot of PLS

Stress distribution on the parabolic leaf spring is shown in fig. 2 and corresponding displacement is shown in fig. 3. The values of stress and deflection obtained by FEA are shown in Table 4 below.

Table 4 - Output parameters by FEA

S.N.	PARAMETER	VALUE
1	Max Von Mises Stress	523423360 N/m ²
2	Max Deflection	14.6 mm
3	Mass	4.863 kg

Design of Experiment: It may also be defined as a statistical technique which studies the effects of multiple variables simultaneously. It determines the factor combination for optimum result. DOE offers a fast & efficient means for defining the values of these parameters that would produce the fewer number of defects. There are many algorithms available in CATIA. Here design of experiment is used to find out the optimum setting of parameter for given loading condition. Design of experiments has been implemented by varying camber from 80 mm to 100 mm in steps of 4 and by varying eye distance

from 1020 mm to 1030 mm in steps of 4 and width vary from 45 mm to 75 mm in step of 5 and thickness of PLS is vary from 4 mm to 10 mm in step of 5.

Table 5 – Most Feasible Parameter Obtained by DOE

S No	Parameter	Value
1	Camber	93.3 mm
2	Thickness	7.0 mm
3	Width	60 mm
4	Leaf Span	1020 mm
5	Stress	450100000 N/m ²
6	Deflection	12.3 mm
7	Mass	5.1 Kg

Variation of Von Mises Stress with respect to Camber, thickness, width and Eye distance is plotted in fig. 4 on the basis of data obtained from DOE

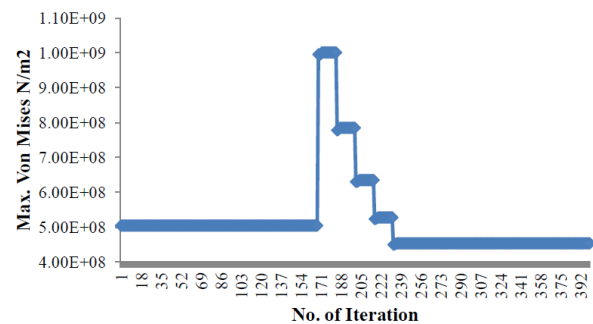


Figure – 4 Result plot from DOE

Table 5 – Most Feasible Parameter Obtained by DOE

S No	Parameter	Value
1	Camber	93.3 mm
2	Thickness	7.0 mm
3	Width	60 mm
4	Leaf Span	1020 mm
5	Stress	450100000 N/m ²
6	Deflection	12.3 mm
7	Mass	5.1 Kg

5. CONCLUSION

This work involves design and analysis of a conventional leaf spring under static loading conditions. The 3D model is prepared in CATIA and then CAE analysis is also performed in the same

software. The results obtained from CATIA using DOE Algorithm, shows that the stress is minimized in the 233th iteration. It was found that there was a considerable reduction in the magnitude of stress. The magnitude of new optimized stress was 450100000 N/m², which led to a 14 % reduction when compared to the magnitude of stress in the existing PLS. So modification in parabolic leaf spring of mini loader truck can be done as camber 93.3 mm and eye distance 1020 mm thickness 7 mm and width should be 60 mm to reduce the maximum stress.

6. REFERENCES

- [1] Manas Patnaik et al, “*Minimization Of Stress In A Parabolic Leaf Spring By Local Algorithm For Constant & Priorities*”, International Journal of Engineering Research and Applications, Vol. 2, Issue4, July-August 2012, pp.1897-1899.
- [2] Narendra Yadav & SAK Jilani, “*Optimization of Multi Leaf Spring by using Design of Experiments & Simulated Annealing Algorithm*”, International Journal Of Modern Engineering Research, ISSN: 2249–6645 , Vol. 4, Iss. 12 Dec. 2014 40.
- [3] Manas Patnaik et al, “*Minimization of Stress of a Parabolic Leaf Spring by Simulated Annealing Algorithm*”, International Journal of Engineering Research and Applications, Vol. 2, Issue 4, July-August 2012, pp.457-460.
- [4] Manas Patnaik et al, “*Study of a Parabolic Leaf Spring by Finite Element Method & Design of Experiments*”, International Journal of Modern Engineering Research, Vol.2, Issue 4, July-Aug 2012 pp-1920-1922.
- [5] Charde R. B. and Dr. D.V. Bhope, “*Investigation of Stresses In Master Leaf of Leaf Spring By FEM and its Experimental Verification*”, International Journal of Engineering Science and Technology, Vol. 4, pp. 633-640, Issue 2, February 2012.
- [6] Gulur Siddaramanna Shiva Shankar, Sambagam Vijayarangan, “*Mono Composite Leaf Spring for Light Weight Vehicle Design, End Joint Analysis and Testing*”, J. of Materials Science, Vol. 12, pp. 220-225, Issue 3, 2006.
- [7] Sachin G. Wagle, Satish S. Oesai, S. B. Wadkar, “*Optimized Design & Analysis of Parabolic Leaf Spring Considering Braking, Cornering & Bump loads*”, National Conference of computational methods in Mechanical Engineering, pp. 47–52 , September 2005.
- [8] Ahmet Kanbolat , Murathan Soner, Mustafa Karaagaç, Tolga Erdogus, “*Parabolic Leaf Spring Optimization and Fatigue Strength Evaluation on The Base of Road Load Data, Endurance Rig Tests and Non Linear Finite Element Analysis*”, SAE International, 2011
- [9] Kumar Krishan and Aggarwal M.L. “*A Finite Element Approach for Analysis of a Multi Leaf Spring using CAE Tools*”, Research Journal of Recent Sciences, Vol. 1, pp. 92-96, December 2012.
- [10] N.P.Dhoshi, N.K.Ingole, U.D.Gulhane, “*Analysis and Modification of Leaf Spring of Tractor Trailer Using Analytical and Finite Element Method*”, International Journal of Modern Engineering Research, Vol. 1, pp. 719-722, Issue 2, December 2012.
- [11] Dakshraj Kothari, Rajendra Prasad Sahu and Rajesh Satankar, “*Comparison of Performance of Two Leaf Spring Steels Used For Light Passenger Vehicle*”,