

# Modeling and Analysis of Non-Pneumatic Tyre by Using Ansys

1.NANDIKANTI SUPRIYA REDDY ,2. Mr. G. VINOD REDDY

1 Pg Scholar, Department of Mechanical Engineering, elleniki college of engineering and technology

2.Asst.Prof, Department of Mechanical Engineering, elleniki college of engineering and technology

## **Abstract—**

Non-pneumatic tires (NPT) or Tweels are the new developments at present increased attention because of potential advantages over pneumatic tires as these are having low mass, no run flat, good contact pressure distribution, and low rolling resistance (RR).

In the present work focuses on modeling and design with reference to vertical stiffness properties, contact pressure and energy loss due to rolling. The finite element analysis using Ansys software is used to study parametrically the vertical stiffness effect and the contact pressure influence with the rolling resistance response by considering the three design variables such as 1. Spokes thickness, 2. Thickness of shear band and 3. Shear modulus.

It is observed that the first two are geometric dependent and where as the third the material dependent parameter. The contact pressure will have more response or effect on the tyre analysis. During the analysis it is assumed to consider the static contact pressure of a non pneumatic tyre spokes as a function of vertical loads which are applied at the centre of hub. The shear band is as a rolling resistance from the shear friction of elastomers.

The design is modeled with CATIA. Where the hub of the Non-pneumatic tire is made with the Aluminium Alloy (Al:7075-T6) and the spokes and shear band with the PU and inner reinforcement and the outer reinforcement are made with the high strength steel (AISI-4340) and the thread is made up of rubber. The design is modeled for 3D lattice honeycomb spoke and the linear spokes.

The models were imported to ANSYS work bench to evaluate the results of deflection of the Non-pneumatic tire, von mises stress of the Non-pneumatic tire and the contact pressure of the Non-pneumatic tire with the road. The load at the hub centre were 3500N and 4000N respectively.

Results indicate that all the design variables have significant effect on RR, with the shear band thickness and shear modulus having the greater effect. The Non-pneumatic tire is modeled in CATIA and analysis is validated through ANSYS.

## **1. INTRODUCTION**

The comfort and safety for a vehicle mainly depends on the good working state and mostly obtained between the components such as vehicle suspension system during

driving. A suspension system of a vehicle which consists of a shock absorber, a spring and most importantly a tire. The main importance of this project is used to isolate the occupants of the vehicle which obtains

any external disturbances occurred by interaction with a roughened ground while advising the driver to keep an efficient and safe control over his vehicle. In a vehicle if one of those components is badly designed, manufactured, mounted or used, severe consequences which can disturb the comfort of people inside the vehicle while driving and even it consider their safety. Purpose as vehicles has designed more robust, reliable and sophisticated, drivers became less awareness over their tires. Tires have significantly developed in terms of safety, performance and wear, but they still need more attention than most of the vehicle components.

There are many issues or problems that can result in a tire failure (puncture or blowout). Such as unpleasant event that can occur at any instant when a tire loses suddenly or gradually its internal air pressure. The pressure drop which prevents the tire from accomplishing its principal task; that is to support the weight of the vehicle and thus, makes the driver failure to maintain a straight and safe trajectory which leads very frequently to a harmful vehicle accident.

The development of non-pneumatic tires (NPT) from the Michelin Tweel is received increasing attention due to the potential advantages over the pneumatic tires.

Non Pneumatic Tyre design are driven by few characteristic properties such as rolling resistance, mass, stiffness, durability and contact pressure mainly. Rolling resistance is one of the major characteristics of interest that contributes to the fuel consumption of vehicles. Stiffness and contact pressure distribution are major properties to be addressed when designing a Non Pneumatic Tyre.

A tire is a product of complex engineered composites. It contains mainly a reinforced rubber toroid mounted to a metallic rim. The air trapped inside the tire creates an inflation pressure which is responsible for carrying the

load, transmitting forces, absorbing shock, providing grip and resisting wear.


### 1.1 Non-Pneumatic Tire Design (NPTD)

The Non Pneumatic Tyre is consists of a composite ring, with at least two circumferential reinforcements separated by a radial distance and is treated as shear beam then it made of a low modulus material which is sandwiched with the reinforcements. During operation, the material with the reinforcements is loaded to shear and deforms in pure shear.

A uniform, and the distribution of pairs of spoke is designed with the ring and to the hub of the wheel. They then deform by buckling. Figure 1.1 represents the structure of the Non Pneumatic Tyre model.

In the design of shear beam and spokes which allows the uniform surface contact pressure with the road surface under the load. With moulding the spokes and the ring together are manufactured with the reinforcements. The outer ring bonded with rubber thread to provide traction.


PU is used for the spokes and to have tyre with low rolling resistance the viscoelastic energy loss of rubber may result in design of Non Pneumatic Tyre. The use of PU is a hyper elastic material important because of its shearing properties then it contribute to flexibility, and energy loss, then it gives as a damping.

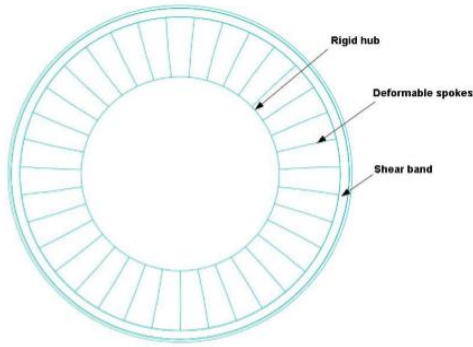

**Figure 1.1 Non-Pneumatic Tire Model (NPTM)**

When the load is applied on the Non Pneumatic Tyre then the hub center, and the composite ring then flattens at the contact surface, which then forms a patch contact. There is a buckling deformation in the spokes with the load applied.


The spokes then under tension without undergoing the deformation. The buckling behaviour of the Tyre is shown in Figure 1.2 when the static load is acted upon.

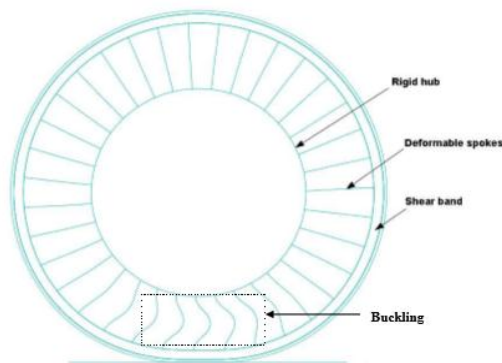

**Figure 1.2 Deformed tyre under the load**

The Non Pneumatic Tyres with the 2D hexagonal cellular spokes and 3-D hexagonal cellular spokes are to have a load carrying capacity and they are analysed under the contact pressures which are given as a vertical loading. Because of complexity of

geometric and material non linearity's the analysis should be of large deformation induced geometric nonlinearity, FEA software, ANSYS, is used for computation for contact pressure of Tyres.

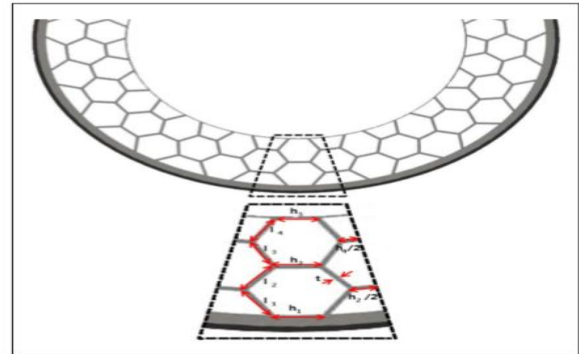


**Fig 1.3 Model of a honey comb lattice structure**

### 1.2 Resistance of Rolling

Resistance due to Rolling is defined as the resistance offered by the tire when the tyre rolls with a flat rigid surface. Initially it occurs when the deformation of the tire in the contact one and when the material behaves as a viscoelastic material in the tire geometry

Because of excellent damping properties and their flexibility the Viscoelastic materials are preferred in the design of tires. Unlike elastic materials, the viscoelastic materials will not store 100% of energy while deformation. They tend to go for some loses or dissipates part of this energy in the process in the form of heat and is known as hysteresis.

The stress-strain curve of a viscoelastic material is shown in Figure 1.3 and the Hysteresis is the area between the loading and the unloading of the curve. Stress-Stain behaviours of several elastomeric materials are presented. By minimising the area between the two curves the rolling resistance of Tyre can be reduced most significantly. This is the process of sequentially optimizing the structure and the properties of the material.

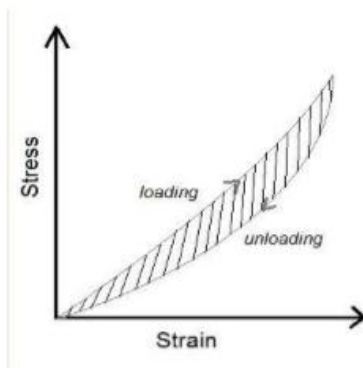

**Figure 1.4 Variation of stress with strain**

It is considered to be the main contributor to the energy loss in tires are due to Hysteresis as it is mainly contributes 95% of the total energy loss in tires. Therefore the viscoelastic materials used in tyres will results in energy loss thereby resulting in rolling resistance also.

Friction between the road and the tyre is the other factor resulting in energy loss which typically occurs because of the slip of the tire on the road surface. This factor also makes to contribute to a level of 8 % of the total energy loss in tires.

The third most and the least factor influencing to the energy loss in tires is Wind age. This is due to the aerodynamic resistance over the vehicle. It makes to be at the level of 3% of the total energy loss in tires.

The rolling resistance (RR) of the tyre can be part of the energy dissipated or/ and energy lost per distance rolled during the motion is given by

$$F_R = \frac{W_d}{D} \quad \text{eq(1.1)}$$

Where,  $F_R$  = Rolling resistance,  $W_d$  = Energy dissipated or energy lost, and

$D$  = Distance rolled by the tire.

The coefficient of rolling resistance is given by the equation

$$C_{rr} = \sqrt{\frac{z}{d}} \quad \text{eq(1.2)}$$

$C_{rr}$  = coefficient of rolling resistance

$z$  = is the shrinkage depth or deflection =  $\delta$

$d$  = diameter of the wheel

The rolling resistance force is given by the equation is given by

$$F = C_{rr} N \quad \text{Eq(1.3)}$$

$C_{rr}$  = Coefficient of rolling resistance

$N$  = Normal force or load


Rolling resistance of the tire is depends on the vehicle fuel consumption and it also increases the temperature in the tire. In the current scenario of automotive fleet, tires have a short lever on (i) fuel economy; roughly 10% decrease in rolling resistance and 1% better fuel economy. (ii) Rolling resistance is influenced by a number of factors which are the i. load, ii. tire geometry, iii. speed, iv. temperature, and v. contact pressure.

## 2. PROBLEM STATEMENT


The objective of the work is to model, simulate and perform static analysis of a Non Pneumatic tyre used in a four wheeler under working conditions. The Non Pneumatic tyre consists of hub (aluminium alloy), spokes(polyurethane), inner reinforcement (high strength steel), shear band (polyurethane), outer reinforcement (high strength steel) and thread (rubber).

The Non Pneumatic tyre is made of two different geometric structures i.e. linear spokes model is shown in fig 3.1 and honeycomb lattice structure model is shown in fig 3.2. The loading conditions are 3500N and 4000N(acting on a single tyre). The results are interpreted based on the Von Mises stress

induced, deformation and contact pressure developed. Based on deformation of the Non Pneumatic tyre, the rolling resistance is calculated. Based on this the best geometric structure for a Non Pneumatic tyre for the given working conditions is realised.

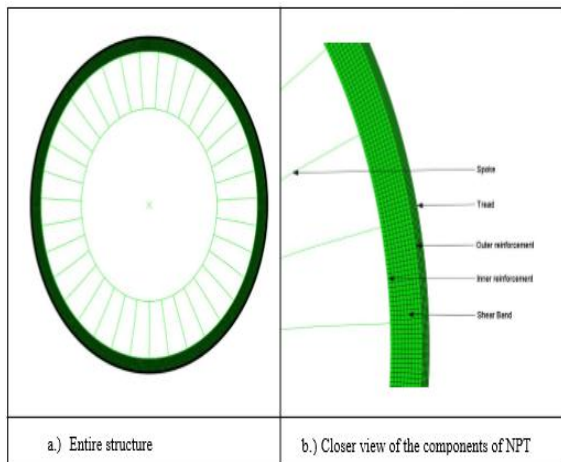

**Fig 2.1 Two dimensional view of linear spoke Non Pneumatic tyre**

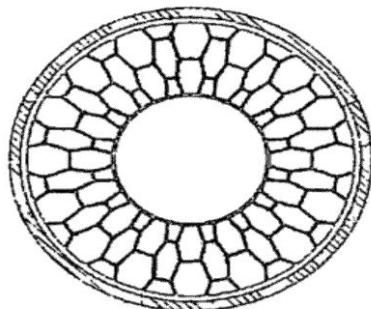

**Fig 2.2 Two dimensional honey comb model of a Non Pneumatic Tyre**

### 3. RESEARCH METHODOLOGY


In this thesis the Non Pneumatic Tyre is modelled in CATIA. The dimensions of the Non Pneumatic Tyre are obtained from previous study for 3D honey comb lattice structure and for the linear spokes the dimensions are taken arbitrary.

The Non Pneumatic tyre is modelled in CATIA and the models are imported to the ANSYS 15 in IGES format. Analysis is done in ANSYS 15 for the deflection, Von mises stress and maximum contact pressure of the Non Pneumatic Tyre.

#### 3.1 Dimension of the Non Pneumatic Tyre with linear spoke

- Outer diameter of the NPT =593mm
- Thickness of the thread = 5mm
- Outer reinforcement diameter=583mm
- Thickness of the outer reinforcement=4mm
- Shear band diameter=575mm
- Thickness of the shear band=12.5mm
- Inner reinforcement diameter=550mm
- Thickness of the inner reinforcement=3mm
- Length of the spokes =150mm
- Thickness of the spoke=9mm
- Width of the spoke =100mm
- Width of the NPT =100mm

In this thesis the design of NPT has modelled all the parts separately and all the part diagrams were assembled with constraining them without gap.

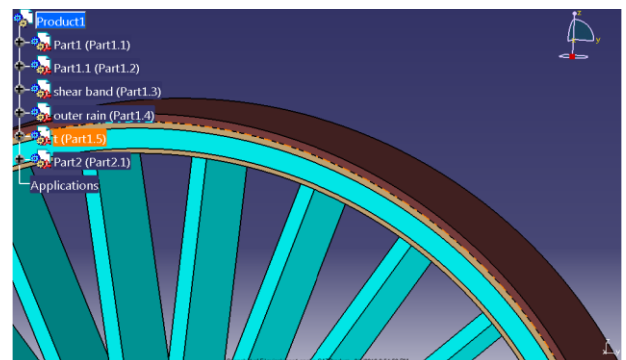

**Fig 3.1 model of NPT with linear spokes in CATIA**

### Dimensions of the 3D honey comb lattice structure of NPT

The design of 3D honeycomb lattice spokes for the NPT. The outer dimensions of the NPT are considered from BMW mini tyre and the 3D honeycomb structure are taken from the previous studies.

The honey comb lattice design is considered from previous studies and an optimal value of the structure is taken into the consideration.

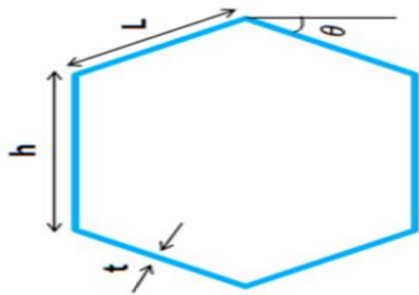


Fig 3.2 Honey comb unit cell structure for spoke

Hexagonal honeycombs are modelled with a cell wall thickness( $t$ ), the cell angle( $\theta$ ), vertical cell length( $h$ ) and the inclined cell length( $l$ ). When designing honeycombs, numerous configurations are available with cell angle( $\theta$ ), cell height( $h$ ), and cell length( $l$ ). The dimensions of the honeycomb spokes which are obtained arbitrarily. It contains three different types of hexagonal spoke. These dimensions are shown in table 1.

Table 1 Dimensions of honey comb unit cell structure

NPT Type	$l$ (mm)	$h$ (mm)	$\theta$ (degree)	$t$ (mm)
Type A	26.25	36.66	15.76	3.2
Type B	29.65	28.52	31.50	3.8
Type C	37.21	16.74	47.14	4.2

Outer diameter of the NPT =593mm

Thickness of the thread = 5mm

Outer reinforcement diameter=583mm

Thickness of the outer reinforcement=4mm

Shear band diameter=575mm

Thickness of the shear band=12.5mm

Inner reinforcement diameter=550mm

Thickness of the inner reinforcement=3mm

Length of the 3D honeycomb lattice structure =150mm

Honey comb cell wall thickness is =5mm

Hub diameter = 250mm

Width of the NPT =100mm

In this thesis the design of NPT has modelled all the parts separately and all the part diagrams were assembled with constraining them without gap.

From the above dimensions, type C unit cell dimension is considered because, from the previous study the type C is having less deflection, the von mises stress is low and having minimum contact pressure.



Fig 3.3 Model of NPT with honey comb lattice structure in CATIA

### Material properties

Table 2

Material	Density, $\rho$ (Kg/m <sup>3</sup> ).	Young modulus,, E(MPa)	Poisons ratio, $\nu$	Shea mod $\mu_0$ (M
Aluminium alloy	2800	$72 \times 10^3$	0.33	$26 \times 10^9$
Polyurethane	1200	32	0.49	$10.8 \times 10^9$
High strength steel ANSI 4340	7800	$210 \times 10^3$	0.29	$80 \times 10^9$
Rubber	1043	11.9	0.49	4

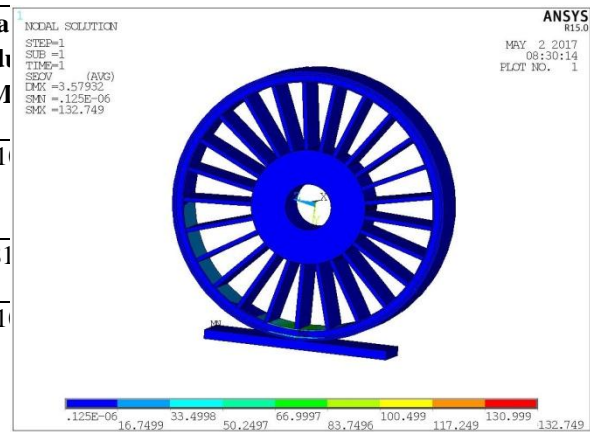


Fig 4.2 Von Mises stress for load of 3500N

Maximum von mises stress of the Non Pneumatic Tyre for load of 3500N =132.749MPa

#### 4. RESULTS AND ANALYSIS

##### Ansysis Simulation Results for Linear Spoke Non Pneumatic Tyre

Two different cases has analysed for each model of linear spoke Non Pneumatic Tyre, through ANSYS successfully.

**Case(1):** for load of 3500N at the hub centre for linear spokes Non Pneumatic Tyre.

Result showing the deflection of the Non Pneumatic Tyre for a load of 3500N



Fig 4.1 Deflection for load of 3500N

Maximum deflection of the Non Pneumatic Tyre with respect to road for a load of 3500N =3.57932mm

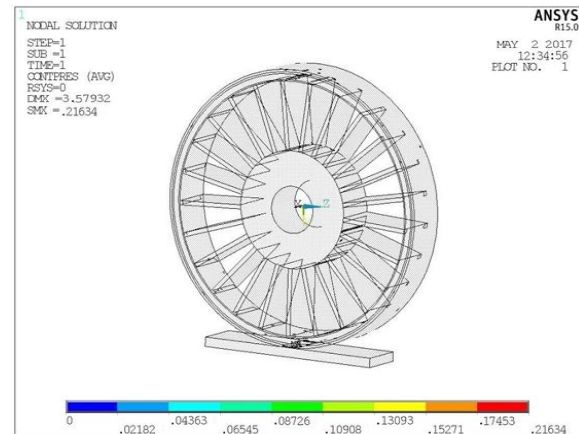


Fig 4.3 Maximum contact pressure for load of 3500N

Maximum contact pressure of Non Pneumatic Tyre for load of 3500N=0.21634Mpa

**Case(2):** for load of 4000N at the hub centre for linear spokes Non Pneumatic Tyre.



Fig 4.4 Deflection for load of 4000N

Maximum deflection of the Non Pneumatic Tyre with respect to road for a load of 4000N = 3.97932mm

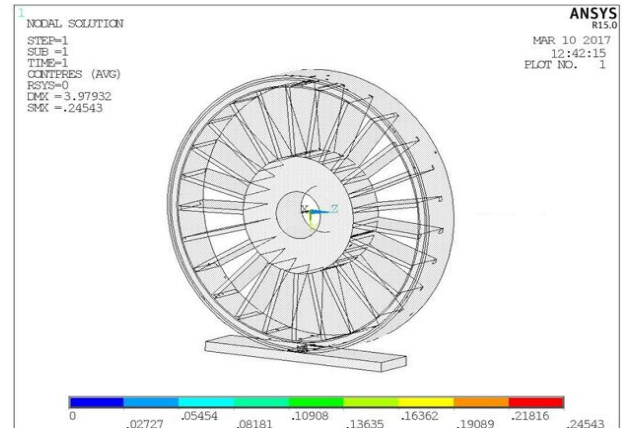


Fig 4.6 Maximum contact pressure for load of 4000N

Maximum contact pressure of the Non Pneumatic Tyre for load of 4000N = 0.24543Mpa

### ANSYS Simulation Results for 3D Honey Comb Lattice Structure Non-Pneumatic Tyre

Two different cases has analysed for each model of 3D honey comb lattice structure spoke Non Pneumatic Tyre, through ANSYS successfully.

**Case(1):** for load of 3500N at the hub centre for 3D honeycomb lattice structure spokes Non Pneumatic Tyre.

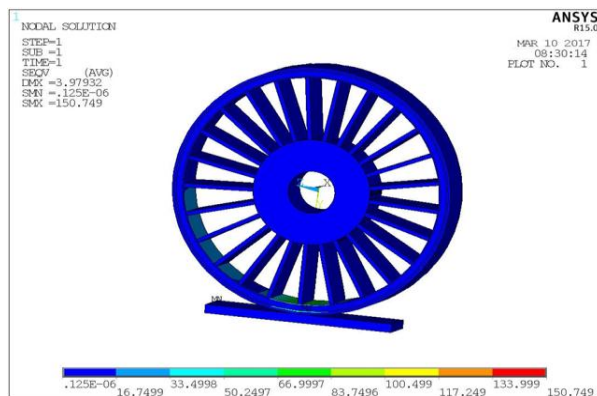


Fig 4.5 Von Mises stress for load of 4000N

Maximum von mises stress of the Non Pneumatic Tyre for load of 4000N = 150.749MPa

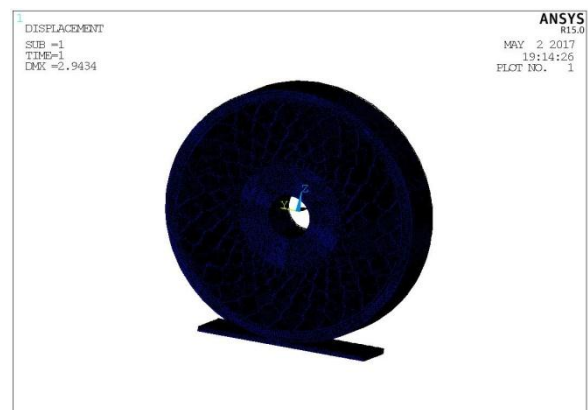


Fig 4.7 Deflection for load of 3500N

Maximum deflection of the Non Pneumatic Tyre with respect to road for a load of 3500N = 2.9434mm



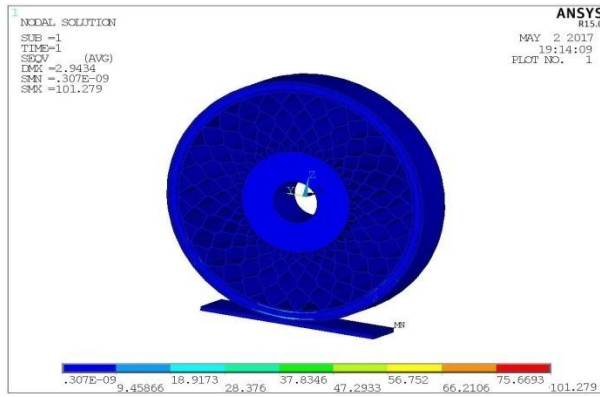


Fig 4.8 Von Mises stress for load of 3500N

Maximum von mises stress of the Non Pneumatic Tyre for load of 3500N = 101.279MPa

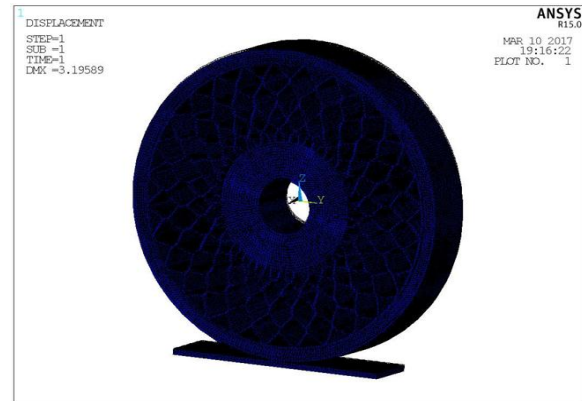


Fig4.10 Deflection for load of 4000N

Maximum deflection of the Non Pneumatic Tyre with respect to road for a load of 4000N = 3.19589mm


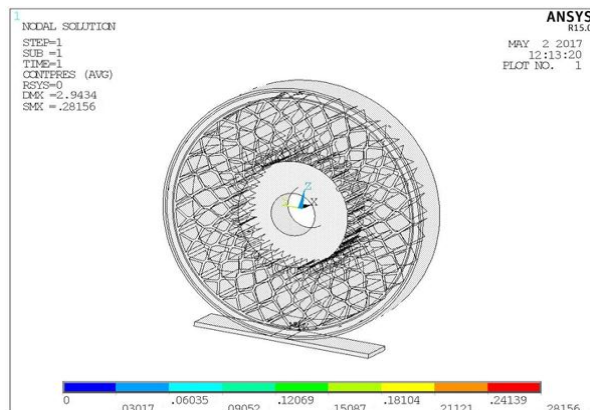


Fig4.9 Maximum contact pressure for load of 3500N


Maximum contact pressure of the Non Pneumatic Tyre for load of 3500N=0.28156MPa

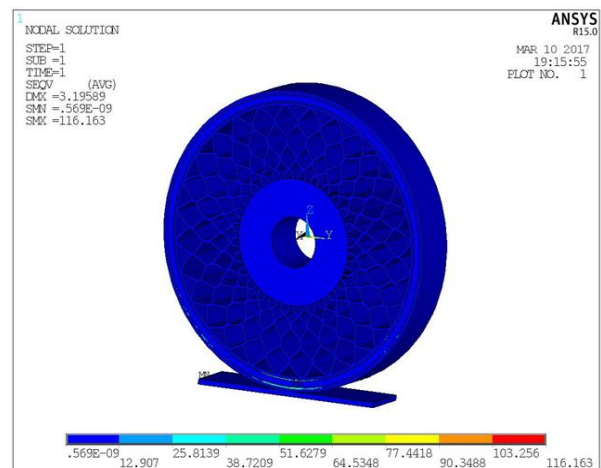

4.11 Von Mises stress for load of 4000N

Maximum von mises stress of the Non Pneumatic Tyre for load of 4000N = 116.163MPa

**Case(2):** for load of 4000N at the hub centre for 3D honeycomb lattice structure spoke Non Pneumatic Tyre

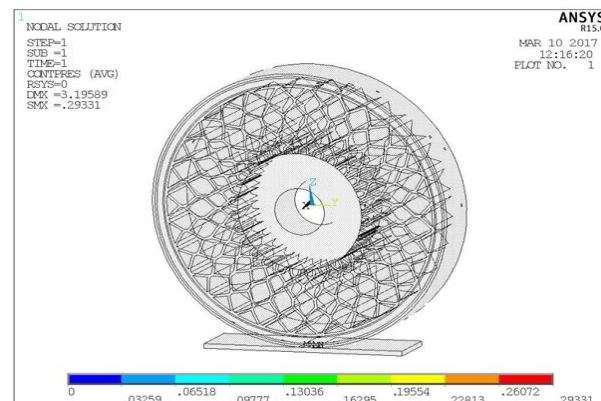

**4.12 Maximum contact pressure for load of 4000N**

Maximum contact pressure of the Non Pneumatic Tyre for load of 4000N=0.29331Mpa

**5. CALCULATION OF ROLLING RESISTANCE COEFFICIENT**

The coefficient of rolling resistance is given by the equation

$$c_{rr} = \sqrt{\frac{z}{d}}$$

$c_{rr}$ = coefficient of rolling resistance

$z$ = is the shrinkage depth or deflection =  $\delta$

$d$  = diameter of the wheel

Coefficient of rolling resistance for a load of 3500N of linear spokes NPT is

$$c_{rr} = \sqrt{\frac{3.57932}{593}} = 0.0776913$$

Coefficient of rolling resistance for a load of 4000N of linear spokes NPT is

$$c_{rr} = \sqrt{\frac{3.97932}{593}} = 0.081917$$

Coefficient of rolling resistance for a load of 3500N of 3D honeycomb NPT is

$$c_{rr} = \sqrt{\frac{2.9434}{593}} = 0.0704526$$

Coefficient of rolling resistance for a load of 4000N of 3D honeycomb NPT is

$$c_{rr} = \sqrt{\frac{3.19589}{593}} = 0.073412$$

**5.1 Calculations of Rolling Resistance Force**

The rolling resistance force is given by the equation is given by

$$F = C_{rr} N$$

$C_{rr}$  = Coefficient of rolling resistance

$N$  = Normal force or load

Rolling resistance force for a load of 3500N of linear spoke NPT is

$$F = C_{rr} N = 0.0776913 * 3500 = 271.91 N$$

Rolling resistance force for a load of 4000N of linear spoke NPT is

$$F = C_{rr} N = 0.081917 * 4000 = 327.668 N$$

Rolling resistance force for a load of 3500N of 3D honey comb NPT is

$$F = C_{rr} N = 0.0704526 * 3500 = 246.58 N$$

Rolling resistance force for a load of 4000N of 3D honey comb NPT is

$$F = C_{rr} N = 0.0734122 * 4000 = 293.64 N$$

These above calculated values for coefficient of rolling resistance and rolling resistance force are tabulated along with the deformation, Von Mises stress and maximum contact pressure of the Non Pneumatic Tyre in table 3.

**Table 3 Results of Non Pneumatic Tyre**

	Linear spoke @ load 3500N	Linear spoke @ load 4000N	3D honeycomb spoke @ load 3500N	3D honeycomb spoke @ load 4000N
<b>Deflection(<math>\delta</math>) in (mm)</b>	3.57932	3.97932	2.9434	3.19589
<b>Von mises stress in (MPa)</b>	132.749	150.749	101.279	116.163
<b>Contact pressure In (MPa)</b>	0.21634	0.24543	0.28156	0.29331
<b>Coefficient of Rolling Resistance</b>	0.0776913	0.081917	0.0704526	0.0734122
<b>Rolling Resistance force( N )</b>	271.91	327.668	246.58	293.64

## 6. CONCLUSION

- ❖ The percentage reduction in Rolling Resistance of 3D honeycomb lattice structure of Non Pneumatic Tyre to the linear spokes of Non Pneumatic Tyre is 11.13% and 10.38% for load of 3500N and 4000N respectively.
- ❖ The contact pressure of 3D honeycomb lattice structure of Non Pneumatic Tyre to the linear spokes of Non Pneumatic Tyre has increased by 27.69% and 16.32% for a load of 3500N and 4000N respectively.
- ❖ The percentage reduction in Rolling Resistance force of 3D honeycomb lattice structure of Non Pneumatic

Tyre to the linear spokes for Non Pneumatic Tyre is 11.27% and 10.38%.

- ❖ Deflection of the 3D honeycomb Non Pneumatic Tyre is less than the linear spoke Non Pneumatic Tyre.

3D honeycomb lattice structure of Non Pneumatic Tyre is giving better performance compared to the linear spokes Non Pneumatic Tyre.

## REFERENCES

1. Bert Bras and Austin Cobert., " Life-Cycle Environmental Impact of Michelin Tweel Copyright © 2011 SAE Intl 2011-01-0093 Published in 2011.
2. M.L. JU, H. JMAL, R. DUPUIS, E. AUBRY. Visco-hyperelastic



- model for polyurethane foam: MIPS, Université de Haute Alsace, 21ème Congrès Français de Mécanique.
3. Rutika Gotad, Sukanya Yadav , Aarti Dung. , Tweel Tire Technology of NPT In Science & Engineering (IJAFRSE).
  4. C. Manibaalan, Balamurugan.S, Keshore, Dr.Joshi.C.Haran. Static analysis of airless tire, in the IJSER Publications, V3, n8, 2013, ISSN 2250-3153.
  5. A.M. Aboul-Yazid, M.A.A. Emam, S. Shaaban1 and M.A. El-Nashar. , Effect of spokes structures on characteristics performance of non-pneumatic tires (IJAME) ISSN: 2229-8649, ISSN: 2180-1606.
  6. Anuj Suhag, Rahul Dayal. In this method Static Analysis on Custom Polyurethane Spokes of Airless Tire, which is obtained in IJSER , V3, Issue 11, 2013, ISSN 2250-3153.
  7. Kwangwon Kim, Seunghye Kim, Jaehyung Ju and Doo-Man Kim. , Contact pressure of a non-pneumatic tire with three dimensional cellular spokes, proceedings of the ASME 2011 International Mechanical Engineering Congress & Exposition IMECE2011 November 11-17, 2011, Denver, Colorado, USA.
  8. K.Periasamy, S.Vijayanb. Design and development of airless car tire, Sept., 2014. ©IJAET ISSN: 22311963.
  9. Niranjana Thyagaraja Clemson University, Determination Of A Novel Non Pneumatic Wheel Shear Beam For Low Rolling Resistance,11-2005.
  10. Chihun Lee, Jaehyung Ju and Doo-Man Kim, The dynamic properties of a non-pneumatic tire with flexible honeycomb spokes. International Mechanical Engineering Congress & Exposition IMECE 2012 November 11-14, 2012.