

Privacy Protection Using Encrypted Images

Dr.B Raveendranadh Singh¹, M.Sangeetha² & Addula Sandhya³

¹Principal, Prof. in CSE

Visvesvaraya College of Engineering and Technology,
M.P Patelguda, Ibrahimpatnam (M), RangaReddy (D)-501510, India
Email:1.brm.singh@gmail.com

²Head of the Dept,

Department of Computer Science & Engineering
Assoc.Professor (CSE), Visvesvaraya College of Engineering and Technology,
M.P Patelguda, Ibrahimpatnam (M), Ranga Reddy (D)-501510, India
Email:1.moligisangeetha@gmail.com

³M.Tech Student, Department of Computer Science & Engineering,

Visvesvaraya College of Engineering and Technology,
M.P Patelguda, Ibrahimpatnam (M), Ranga Reddy (D)-501510, India
Email: addula.sandhya@gmail.com

Abstract—

Privacy has got considerable attention but is still there is a problem inside multimedia local community. Consider some sort of cloud research scenario the spot that the server can be resource-abundant, and is also capable regarding finishing the particular designated duties. It can be envisioned in which secure advertising applications using privacy preservation is going to be treated seriously. In view that the scale-invariant characteristic transform (SIFT) has become widely adopted in several fields, this project may be the first to the fact that privacy-preserving SORT (PPSIFT) and to address the condition of safeguarded SIFT characteristic extraction and also representation inside encrypted domain.

Keywords— Feature Extraction, Privacy Preservation, Security

Introduction

Just lately, people include gotten helpful to accessing in addition to querying multimedia systems data using a server as a result of increase involving bandwidth capacity on the internet. In addition, if your remote server has strong computation/storage ability with abundant resources, the people can retailer their data for the server side and exploit the computational power provided by the server for you to execute their particular intended responsibilities. In this specific circumstance, the Web not simply provides a passive look for service

but has a very interactive mechanism. This scenario is comparable to cloud computing and is particularly of useful use intended for multimedia info that demand immense computation and transmission. Under these kinds of framework, the transmitting of individual data in addition to permission on the server throughout accessing your stored info pose the challenge of privacy-preserving which is usually ignored inside multimedia neighborhood.

Although encryption is really a prevalent approach to securing transmitted data, the information in your encrypted form (i.e electronic., ciphertext) can impede operations which are usually conducted for the plaintexts. As a way to further procedure ciphertexts and have the corresponding leads to the plaintext domain, some studies have been devoted to several aspects involving encrypted domain operations. Only recently, secure word document search inside encrypted domain has become extended for you to secure multimedia systems data look for. While these studies have been done with content-based multimedia systems retrieval over either encrypted query, or the two encrypted query and databases, the applicable scale-invariant function transform (SIFT) conducted inside encrypted domain still will never be addressed. In below are a few, we can target benefit of privacy-preserving SORT (PPSIFT) in addition to explore its broad software. SIFT is surely an algorithm intended for detecting in addition to describing regional features throughout images, and contains been traditionally used in the community of computer vision in addition to pattern recognition automobile powerful attack-resilient function point discovery mechanism.

The contributions in this project throughout realizing comfort preserving SORT are summarized as follows. The Difference-of-Gaussian (DoG) transform has to be executed inside encrypted

domain. We look into how Doggy transform can be performed within your Paillier cryptosystem, that's associated with the error chance analysis. Our setup of DoG inside encrypted domain is analog for you to implementations involving DCT in addition to DWT inside encrypted domain. We provide a homomorphic comparability strategy that can be conducted inside encrypted domain to ensure local extrema might be securely diagnosed for SORT feature place extraction. PPSIFT has the ability to achieve regional extrema extraction, descriptor working out, and descriptor related, all inside encrypted domain, without numerous rounds involving communication between your user in addition to server. On the other hand, only one-round involving pre-communication is important for synchronization involving data. PPSIFT has become evaluated to uncover its fineness in accomplishing both comfort and robustness within benchmark violence and datasets, in comparison with the authentic SIFT

Previous Work

In the last decade biometric detection and validation has increasingly gained importance for a variety of endeavour, resident and law enforcement applications. Illustrations vary from mark on finger and retinal scan systems, to voice and face recognition systems etc. Many governments have already proposed electronic passports and IDs that contain biometric information of their legal holders[7]. In particular it seems that face detection systems have fashionable and aimed to be installed in observation of public places, access and border control at airports. For some of these use cases one needs online search with short response and least amount of online transmission [6].

Moreover, face recognition is far and widely used in online picture albums such as Google Picasa and

public network platforms such as Face book which have become popular to share photos with the people in our world. These platforms support automatic detection and tagging of face in uploaded images[7]. Additionally, images can be tagged universally. The widespread use of such face recognition systems, however, raises privacy risks since biometric information can be collected and misused such as tracking against one's will. These issues raise the desire to construct privacy-preserving face recognition systems[1]

Reversed Index Encryption: Since the vocabulary tree is created by and thus known to the service provider, proper encryption of the inverted indexes generated by the content owner is needed. Otherwise, the server can look up the visual words present in each image from the word IDs, and thus infer the image content. We protect the inverted index by first performing a random permutation on the word IDs so that the i th word will now have an ID. Computing random permutation takes $O(N)$ time and needs to be done only once on the user side. However, the server needs to guess the correct IDs from $O(N!)$ possibilities, which is computationally infeasible given the typically large value of N . Scrambling word IDs alone is not secure enough, because the server can still use visual word frequencies to identify the words that appear more frequently. [2]

Recently, people are getting used to accessing and querying multimedia data on a server due to the increase of bandwidth capacity over the Internet. In addition, if the remote server has strong computation/storage capability with abundant resources, the users can store their data on the server side and exploit the computation power provided by the server to execute their intended tasks. Under this circumstance, Web not only provides passive search service but also is equipped with high interactive mechanism. This scenario is analogous to cloud

computing, and is of practical use for multimedia data that demand immense computation and communication.

Under this kind of framework, the transmission of personal data and permission of the server in accessing the stored data, however, create the privacy issue that is usually ignored in the multimedia community. Although encryption is a prevalent way in securing the transmitted data, the data in the encryption form (*i.e.*, cipher text) will impede the operations that are usually conducted on the plaintexts. In order to further process cipher texts and obtain the corresponding results in the plaintext domain, some studies have devoted to encrypted domain operations on several aspects. [3]

In order to execute SIFT in a cipher text domain and still obtain results equivalent to those generated in the corresponding plaintext domain, the prerequisite is to seek a cryptosystem that can provide the required operations, such as addition, multiplication, and so on. In the original SIFT, in addition to common additive and multiplicative operations, the comparison operation is a must for finishing feature point detection. Nevertheless, the design of a cryptosystem that can possess homomorphic comparison is still a challenging issue. Therefore, our goal is to seek a cryptosystem that can provide additive and multiplicative homomorphism, and develop a new approach to achieve homomorphic comparison*.

To achieve operations in the cipher text domain and obtain results equivalent to those in the plaintext domain, homomorphic encryption has been widely investigated. We choose the Paillier cryptosystem as the platform for designing our secure SIFT method because Paillier cryptosystem provides additive and multiplicative homomorphism, achieves provable security based on modular arithmetic, and is

computationally comparable to RSA. In fact, Paillier cryptosystem has been widely adopted in various applications. Some recent promising privacy-preserving applications include secure transform, face recognition, secure watermark detection, sensor network surveillance, and secure distortion computation. [3]

In SIFT detection, a key point is a pixel if and only if it is a local extreme in the scale space defined by difference-of-Gaussian (DoG) functions. A local extremism at a pixel is found if its DoG magnitude is larger than those of its neighbours. The idea behind our method is based on the observation that an original key point will not be detected by SIFT if another extremism is maliciously generated to hand[8]. In other words, there are two equal extreme in a finding region such that the duplicate extremism is enforced to be at one of the eight neighbours in the scale space to evade key point recognition[8].

Currently having solutions for protect signal modifications use cryptographic primitives in order to construct a protected layer on top of the processing signal modules. This approach is represented with An example by the encryption of compressed multimedia signals: the multimedia content is first of all compressed through a state-of-the-art compression scheme, and next encryption of the compressed bit stream is carried out[8]. Therefore. The content can be processed before the bit stream must be decrypted. These results typically assume that the involved parties or devices[9] faith on all, and thus cryptography is used only to keep the data safe against third parties or to provide authenticity. Unfortunately, this may not be sufficient in some applications, since the owner of the data may haven't hope the dispensation devices, or those factors that are required to manipulate them. As a first example, let us consider a situation where a user (say Alice) resorts to a continuous monitoring healthcare system

to analyse her medical/biological data in order to get a fast pre alert diagnosis helping her to stay healthy[8]. Moreover she will not trust the service provider that will be required to analyse Alice's data while they are encrypted[8]. On other side, they represent processing algorithms for its business to keep secret by the service provider

As a second example, we may consider a situation where a user wants to query a database (e.g. a database containing biometric data) without revealing to the database owner (say Bob) what he/she is looking for (again this necessity may be due to privacy reasons)[8]. It is evident that the availability of tools that allow to process an encrypted query would represent a valuable help to solve this obstacle. [5]

Proposed System

A. *Cryptosystem Using Paillier Method*

In this module to help execute SIFT in a ciphertext domain whilst still being obtain results corresponding to those generated in the corresponding plaintext sector, the prerequisite is usually to seek any cryptosystem that may provide the specified operations, for instance addition and also multiplication. Within the original SIFT, in improvement to typical additive and also multiplicative operations, the contrast operation is really a must with regard to finishing feature point diagnosis. We make use of the Paillier cryptosystem because the platform with regard to designing the secure SIFT method because it provides item homomorphism and also plaintext multiplication, achieves provable security based on modular maths. A couple of private and also public important factors are arranged. Let v and q be a pair of large primes, and also let $N = v * q$. Let Z denote the set of non-negative integers that have multiplicative inverses

modulo. We additionally select grams $\square Z * N$ to satisfy gcd and also $\lambda = \text{lcm}(p - 1, q - 1)$ could be the private key. The couple of N and also g defines people keys. Allow message for being encrypted always be denoted since m . The ciphertext springs with your uniformly decided on key and also integer amounts modulo is required. Decrypting your ciphertext h , we make use of the private key λ and acquire the plaintext l .

B. Encryption By Gaussian

In this particular module initial step on the SIFT framework for taking out the element points would be to execute Difference-of-Gaussian turns. For this, the image is convolved along with Gaussian filters, which are assigned unique variances equivalent to weighing machines, and this differences in between two neighboring Gaussian-blurred photographs are taken. Feature things are then chosen because local extrema on the DoG photographs, which come about at a number of scales. Especially, a Canine image made at 2 neighboring weighing machines p_i and also p_j . To be able to preserve this users privateness, the image I is usually encrypted utilizing homomorphic encryption. This resultant encrypted information are portrayed as: $I_e(x, y)$ where by E means the Paillier cryptosystem and also r could be the uniformly chosen key. Pertaining to implementation, the first Gaussian filtering coefficients are adjusted because integers considering that the Paillier cryptosystem can only operate inside the integer website.

C. Feature Point Detection

In this particular module the particular challenging task may be the local extrema removal operating within the encrypted sector. The uniformly chosen crucial r should be variable in order to meet semantic security. Under this particular circumstance, provided the plaintext meters, the resulting ciphertexts c 's will change according towards used

individual keys r 's, resulting in one-to-many mapping. In the two-dimensional situation, like the particular images regarded here, the particular uniformly chosen key, influenced by the location of your pixel, is needed. Hence, a Canine image within the encrypted sector using various r 's could be derived that is a function on the uniformly chosen key r that may be dependent on a pixel's position (x, y) . Since the particular Gaussian kernel H is mixed up in calculation associated with R_p , we know that R_p is dependent upon the support of $G()$ instead of the image dimension. In the particular proposed technique, in addition towards encrypted query data, the extra data would have to be sent to server with regard to subsequent privacy-preserving processing would be the secure thresholds T_o 's.

D. Feature Point Descriptor

In this module all of us describe the best way to derive SIFT feature descriptors from the plaintext site, which is then extended towards the ciphertext site. An alignment assignment is executed per detected function point. Then, a normalized 16×16 area expanded from your region within the derived orientation is made from which in turn feature descriptors usually are obtained the following. An SIFT feature descriptor is made for the actual 16×16 region, that is further broken down into fifteen 4×4 blocks, around a feature point. In addition, the calculation from the feature descriptor is accomplished at the scale the place that the feature is detected. For every 4×4 block, the actual gradient value and alignment are, respectively, computed per position (x, y) inside 4×4 block. Then, the histogram involving weighted magnitudes outlined on numerous restrictive directions is derived. For function descriptor extraction conducted from the encrypted site, the weighted magnitudes located at the four axes i. e., positive in addition to negative x -axes in addition to positive in addition to negative y -axes usually are calculated on this project, that'll constitute a new 4-dimensional

vector. Since quite a total involving sixteen four \times four blocks in a very 16×16 area, a 64-dimensional function descriptor is made. It need to be noted that no more than four hard to follow directions are used in this project as the operation from the secure intrinsic product⁵ is necessary to derive the actual included angle using the two sides not both equally coinciding using the x in addition to y axes..

Results

This paper is implemented in the following concept and different results are shown as following, The proposed paper is implemented in .Net on a P-4 System with least of 25 GB Memory and 1.5GB Random Access Memory. The propose paper's concepts give accurate results and has been efficiently tested on different Image Datasets.

Fig 1

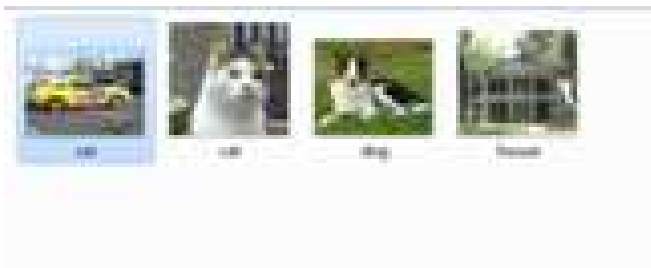


Fig. 1 Data Set for Proposed system



Fig. 1 Proposed system performing Privacy



Fig. 3 Features of Original Image



Fig. 4 Comparative Features of Original and Privacy Image

Conclusions

We have proposed the homomorphic encryption-based privacy-preserving (PPSIFT) approach to deal with the privacy-preserving trouble encountered in the cloud calculating environment, the place that the server can certainly finish this tasks connected with SIFTbased programs without mastering anything to breach this user's privacy. In PPSIFT, probably the most challenging trouble, i. age., homomorphic comparison, has been solved within this paper. We show that the proposed Paillier cryptosystem-based PPSIFT system achieves provable security dependant on DLP and RSA, but this computational

complexity needs to be further lessened, even when the current method is built to be executed within the server part that are the owners of powerful methods. We think that the offered work is definitely an important step toward privacy-preserving multimedia applications within an environment where by privacy is really a major concern.

References

- [1] W. Lu, A. Swaminathan, A. L. Varna, and M. Wu, "Enabling search over encrypted multimedia databases," *Proc. SPIE*, vol. 7254, pp. 1–11, Jan. 2009.
- [2] J. Shashank, P. Kowshik, K. Srinathan, and C. Jawahar, "Private content based image retrieval," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit.*, Jun. 2008, pp. 1–8.
- [3] C. Y. Hsu, C. S. Lu, and S. C. Pei, "Homomorphic encryption-based secure sift for privacy-preserving feature extraction," *Proc. IS&T/SPIE Media Watermark., Forensics, Security*, vol. 7880, pp. 788005-1–788005-17, Jan. 2011.
- [4] Z. Yang, S. Kamata, and A. Ahrary, "NIR: Content based image retrieval on cloud computing," in *Proc. IEEE Int. Conf. Intell. Comput. Intell. Syst.*, vol. 3. Nov. 2009, pp. 556–559.
- [5] B. Moskovich and M. Osadchy, "Illumination invariant representation for privacy preserving face identification," in *Proc. IEEE Comput. Vis. Pattern Recognit. Workshop*, Jun. 2010, pp. 154–161.
- [6] kede ma, weiming zhang, xianfeng zhao, member, ieee, nenghai yu, and fenghua li "reversible data hiding in encrypted images byReserving room before encryption" *ieee transactions on information forensics and security*, vol. 8, no. 3, march 2013
- [7] Ahmad-Reza Sadeghi, Thomas Schneider, and Immo Wehrenberg
Horst G`ortz Institute for IT-Security, Ruhr-University Bochum, Germany
- {ahmad.sadeghi,thomas.schneider}@trust.rub.de??, immo.wehrenberg@rub.de
- [8] Tiziano Bianchi, Member, IEEE, Alessandro Piva, Member, IEEE, and Mauro Barni, Senior Member, IEEE
- [9] Chao-Yung Hsu,1,2 Chun-Shien Lu,2,* and Soo-Chang Pei 11Graduate Institute of Communication Eng., National Taiwan University, Taipei, Taiwan, ROC
2Institute of Information Science, Academia Sinica, Taipei, Taiwan, ROC

Authors Biography

Sri. Dr. Bhaludra Raveendranadh Singh

M.Tech,Ph.D.(CSE),MISTE,MIEEEE(USA),MCSI
Principal.

He obtained
M.Tech,
Ph.D(CSE)., is a
young, decent,
dynamic



Renowned Educationist and Eminent Academician, has overall 20 years of teaching experience in different capacities. He is a life member of CSI, ISTE and also a member of IEEE (USA). For his credit he has more than 50 Research papers published in Inter National and National Journals. He has conducted various seminars, workshops and has participated several National Conferences and International Conferences. He has developed a passion towards building up of young Engineering Scholars and guided more than 300 Scholars at Under Graduate Level and Post Graduate Level. His meticulous planning and sound understanding of administrative issues made him a successful person.

M.Sangeetha

M.Tech(CSE),
Head of the Dept,
Department of Computer
Science & Engineering,
Assoc.Professor(CSE).



Professor and Head of CSE department,completed bachelor of technology from Swamy Ramananda Theertha Institute of Science & Technology and Post-graduation from Jawaharlal Nehru Technological University, Kakinada campus and is having 12 years of teaching experience. She also published technical papers in various National & Inter National Journals.

Addula Sandhya

M. Tech Scholar, Department
of Computer Science &
Engineering,Visvesvaraya
College of Engineering and
Technology,
M.P Patelguda,
Ibrahimpattanam(M),
RangaReddy(D)-501510.



Email: addula.sandhya@gmail.com

M.Tech scholar in Visvesvaraya College of Engineering and Technology. I completed my bachelor of technology from Prof. Rama Reddy College of Engineering & Technology. An enthusiastic fresher with highly motivated and leadership skills having bachelors of engineering degree in Computer Science & Engineering. Always willing to innovate the new things which can improve the existing technology. Eager to learn new technologies and methodologies.